

LED Parking Lot Light

- 100W~350W LED Parking lot fixture with photocell function easy switch to no photocell function.
- Adopt high transmittance protective lens and 150LM/W.
- SMD 3030 with Type II, Type III, Type V distributions for options.
- High strength aluminum housing with bronze Uv resistant powder coat finish offers durable outstanding corrosion protection and make sure good heat dissipation and long lifespan.

Features

- 100W 150W 200W 240W 320W 350W
- High transmittance protective lens
- UL, cUL, DLC, ETL, cETL, CE approved
- Type II, Type III, Type V distributions
- Photocell auto switch to regular
- IP65 dust free and waterproof
- Die-casting housing anti-corrosion
- 6K High voltage surge test approved
- SMD3030 150Lm/W LED chips
- 120-277, 120-347, 277-480VAC input
- 50,000hrs lifespan
- Ambient operating temperature -40°C to 45°C
- Trunnion, slip fitter, all in one, square round, universal pole bracket
- Replace 400~2000W metal halide/HPS
- No magnetic disturbance driver design
- Adjustable wattages: 60% / 80% / 100%
- Adjustable CCT: 4500K / 5000K / 5700K



Applications

LED Parking Lot Light series can be widely used in urban roads, industrial areas, residential areas, sidewalks, parking lot, schools, gardens and etc.



Series	Lumens	LED Quantity	Wiring	LED Type	Beam Angle Degree	Electrical Data	Color temperature	Color rendering index
NG-PL-100W	15000 Lm	400PCS (200PCS - 4500K) (200PCS - 5700K)	LIVE NAUGHT EARTH	SMD 3030 chips	TYPE II TYPE III TYPE V	Input Voltage 120-277VAC 120-347VAC 277-480VAC 50~60Hz Power Factor(%) >90	WW 3000K NW 4000K DW 5000K CW 5700K	CRI>80
NG-PL-150W	22500 Lm	400PCS (200PCS - 4500K) (200PCS - 5700K)						
NG-PL-200W	30000 Lm	416PCS (208PCS - 4500K) (208PCS - 5700K)						
NG-PL-240W	36000 Lm	608PCS (304PCS - 4500K) (304PCS - 5700K)						
NG-PL-320W	48000 Lm	608PCS (304PCS - 4500K) (304PCS - 5700K)						
NG-PL-350W	52500 Lm	608PCS (304PCS - 4500K) (304PCS - 5700K)						

DIMENSIONS



Slip Fitter



Round & Square (All in One)




Trunnion




Universal





Square Round



Photocell cap
CCT & Wattage
Selector Switch cap


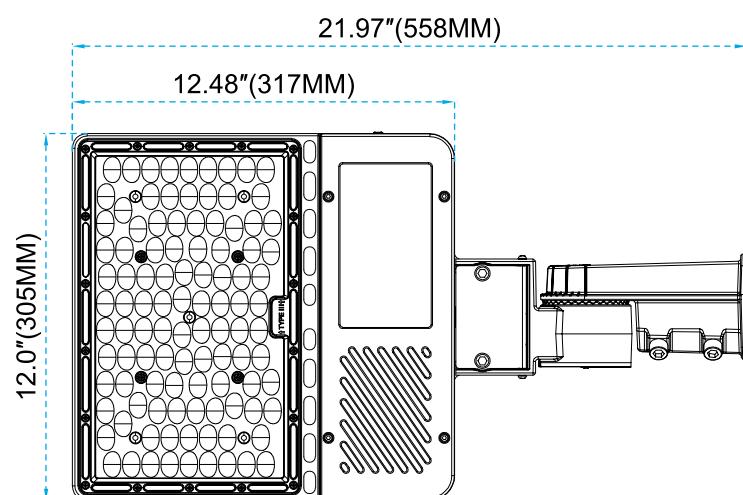


100W 150W 200W

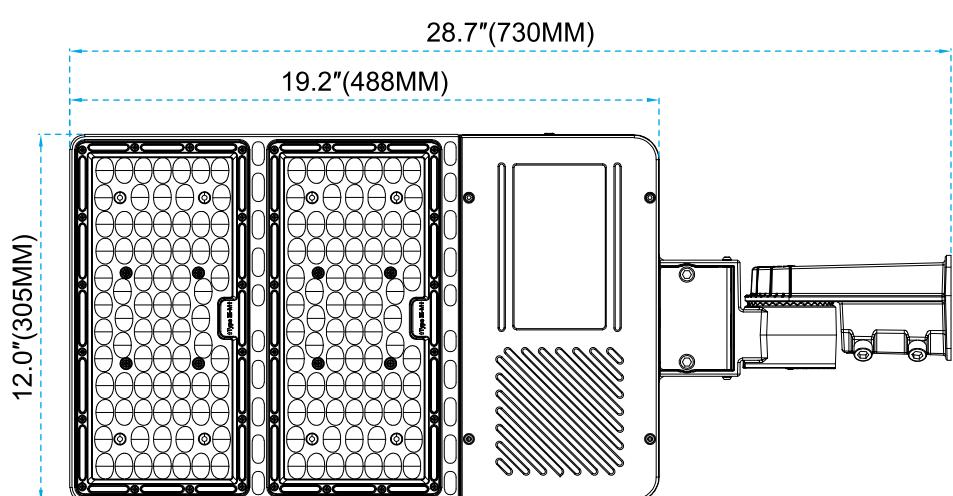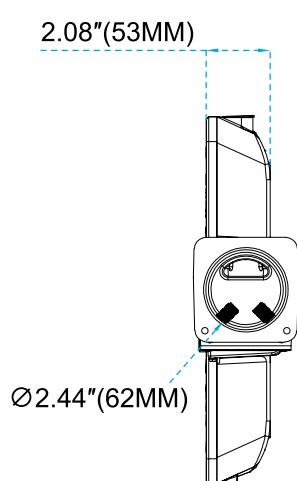



240W 320W 350W

INSTALLATION INSTRUCTIONS

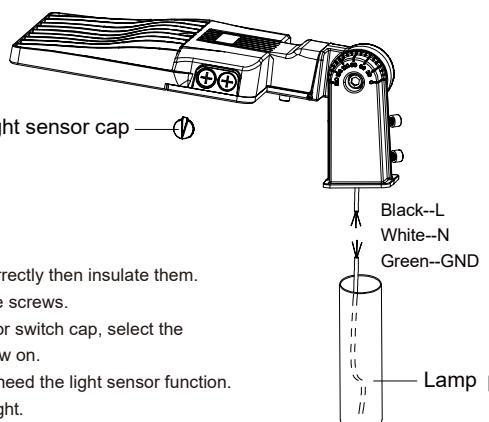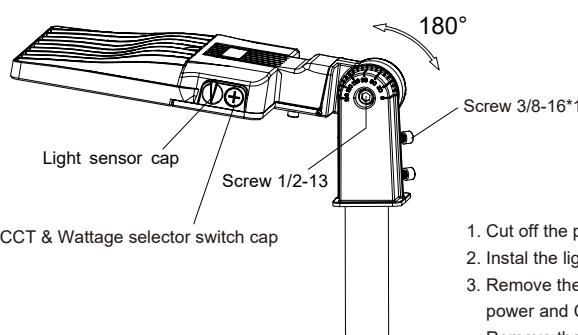



Slip fitter

1. Cut off the power, connect wires correctly then insulate them.
2. Instal the light fixture and tighten the screws.
3. Remove the CCT & Wattage selector switch cap, select the power and CCT you need then screw on.
4. Remove the light sensor cap if you need the light sensor function.
5. Connect the power and turn on the light.

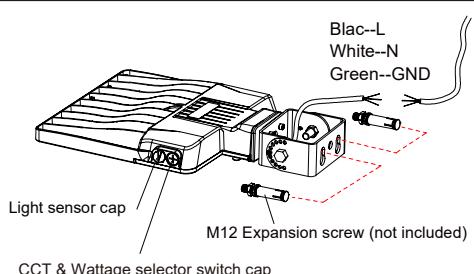



Trunnion

1. Cut off the power, connect wires correctly then insulate them.
2. Instal the light fixture and tighten the screws.
3. Remove the CCT & Wattage selector switch cap, select the power and CCT you need then screw on.
4. Remove the light sensor cap if you need the light sensor function.
5. Connect the power and turn on the light.

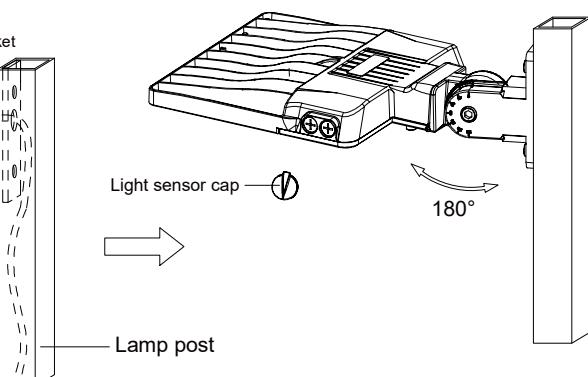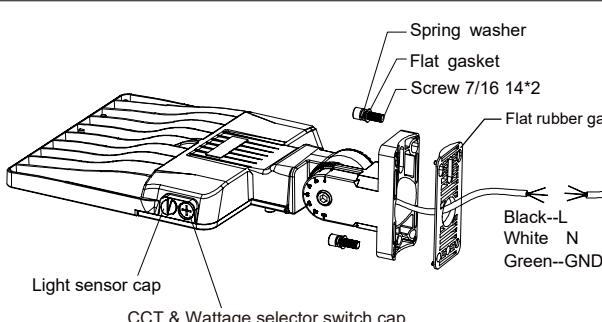


1. Cut off the power, connect wires correctly then insulate them.
2. Instal the light fixture and tighten the screws.
3. Remove the CCT & Wattage selector switch cap, select the power and CCT you need then screw on.
4. Remove the light sensor cap if you need the light sensor function.
5. Connect the power and turn on the light.

1. Cut off the power, connect wires correctly then insulate them.
2. Instal the light fixture and tighten the screws.
3. Remove the CCT & Wattage selector switch cap, select the power and CCT you need then screw on.
4. Remove the light sensor cap if you need the light sensor function.
5. Connect the power and turn on the light.


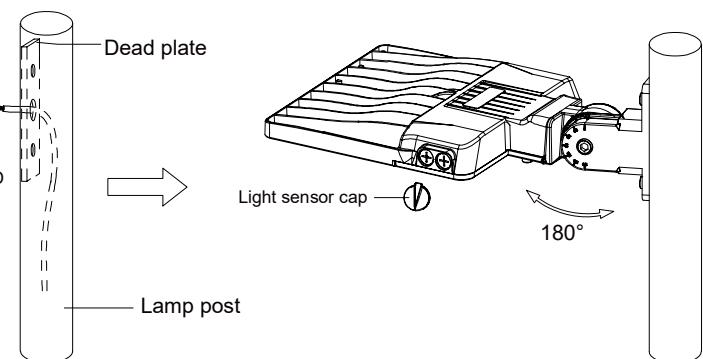
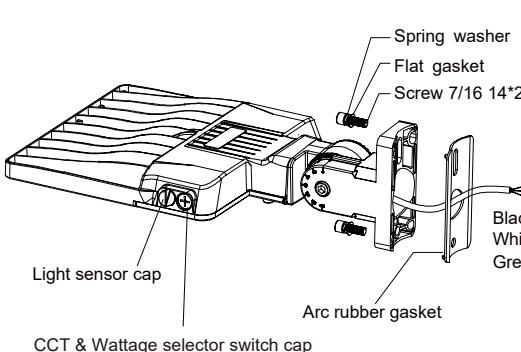


All in one (Round & Square)



INSTALLATION INSTRUCTIONS

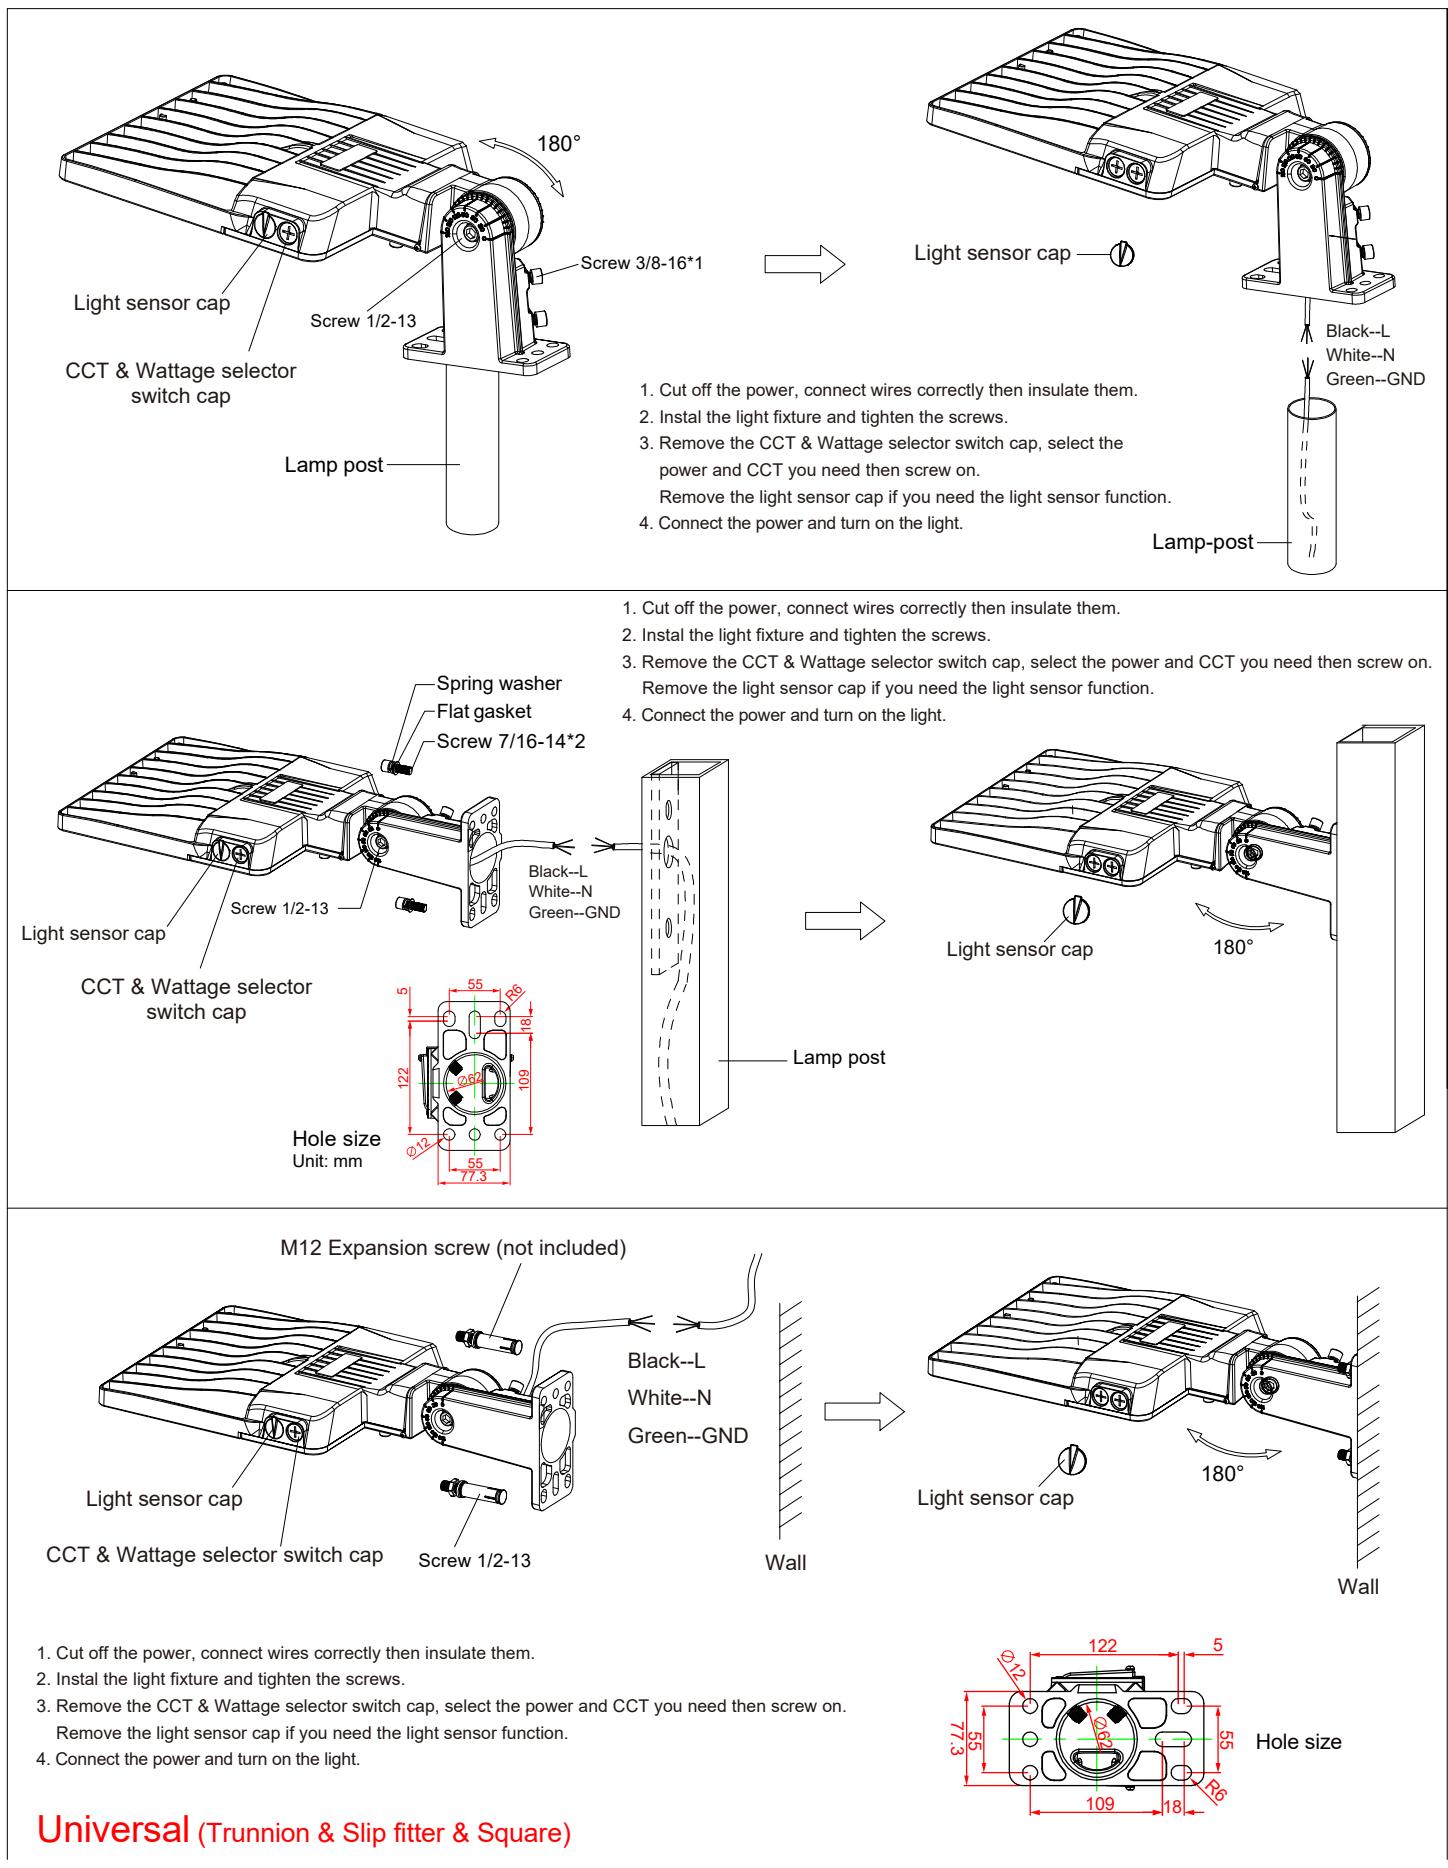



INSTALLATION INSTRUCTIONS

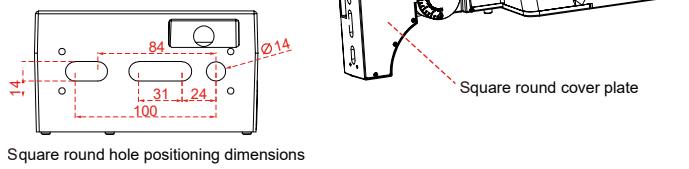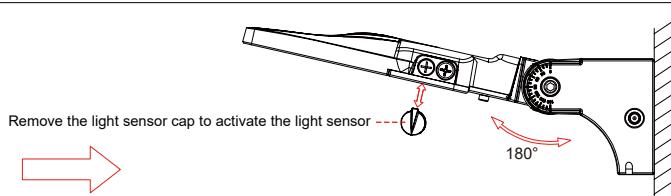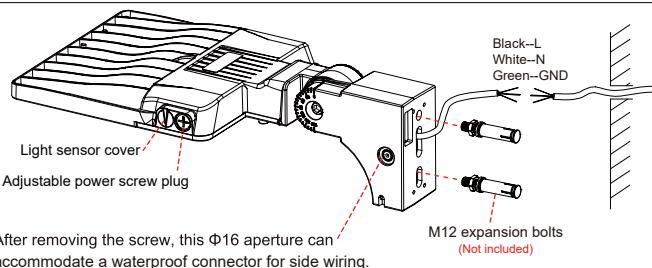

1. Cut off power. Connect the fixture to the mains electricity supply and ensure proper insulation.
2. Drill M12 expansion bolts into the wall. Open the square round cover plate. Install the fixture onto the wall and tighten the nuts.
3. Reinstall the bracket cover plate and tighten the screws.
4. Twist open the power adjustment screw plug and adjust to the desired power level. If a light sensor is required, remove the light sensor cover.
5. Turn on the mains power switch to power on the fixture.

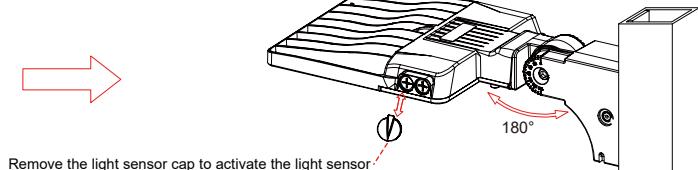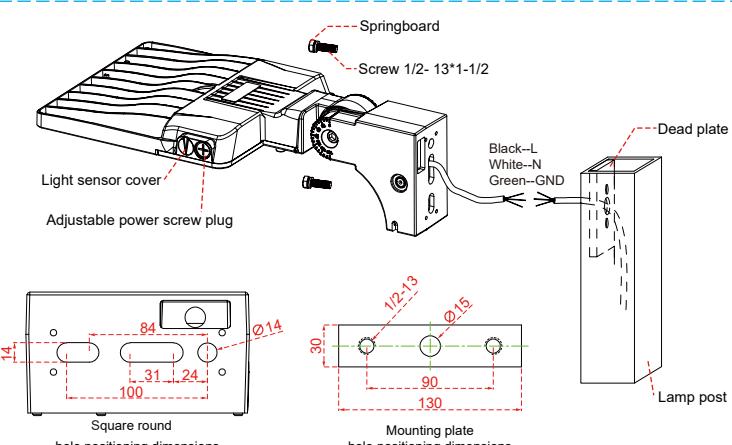


1. Cut off power. Connect the fixture to the mains electricity supply and ensure proper insulation.
2. Drill M12 expansion bolts into the wall. Open the square round cover plate. Install the fixture onto the wall and tighten the nuts.
3. Reinstall the bracket cover plate and tighten the screws.
4. Twist open the power adjustment screw plug and adjust to the desired power level. If a light sensor is required, remove the light sensor cover.
5. Turn on the mains power switch to power on the fixture.

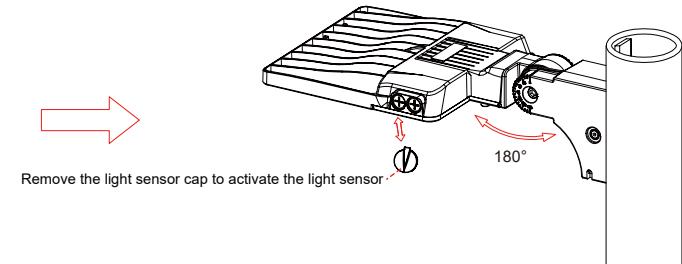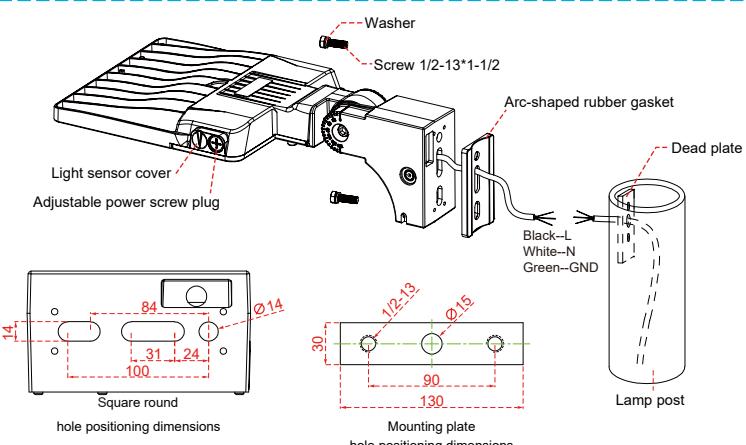

1. Cut off power. Connect the fixture to the mains electricity supply and ensure proper insulation.
2. Drill M12 expansion bolts into the wall. Open the square round cover plate. Install the fixture onto the wall and tighten the nuts.
3. Reinstall the bracket cover plate and tighten the screws.
4. Twist open the power adjustment screw plug and adjust to the desired power level. If a light sensor is required, remove the light sensor cover.
5. Turn on the mains power switch to power on the fixture.


Square Round



CCT Selection Switch: From left to right, CCT increases gradually

Power Selection Switch: From left to right, light power increases gradually

CCT & Wattage Selector Switch

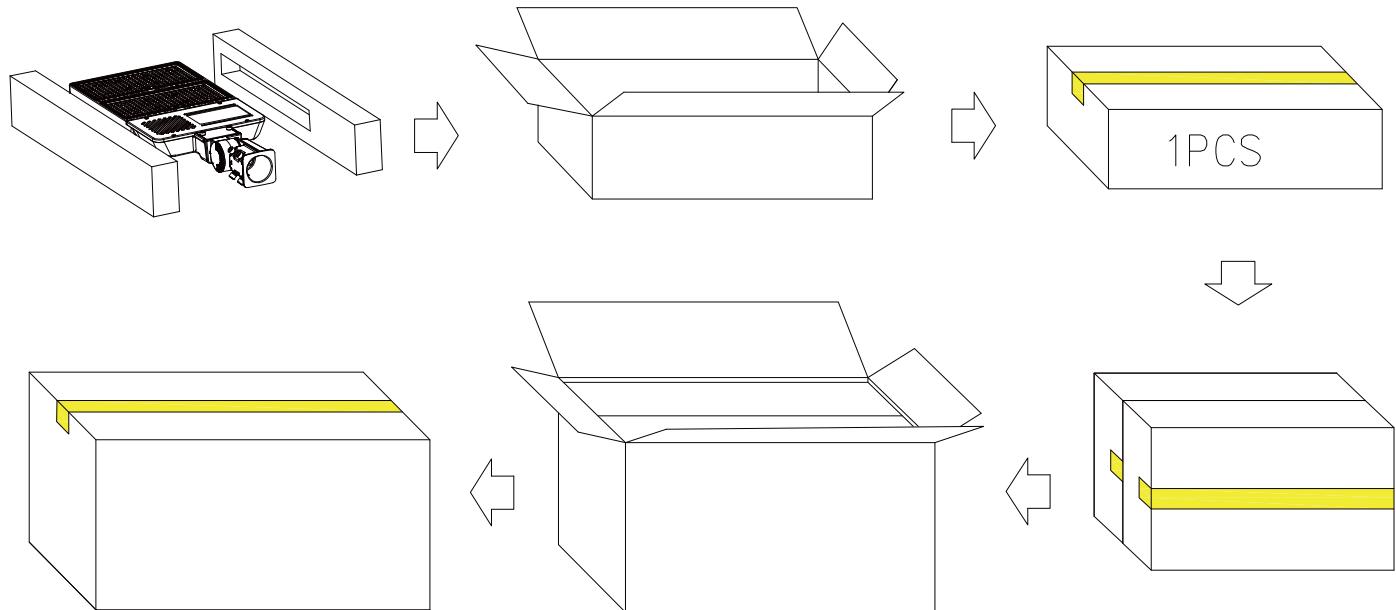

Power	Unit	Size	Gross Weight	Volume
NG-PL-100W	1PC	545x375x115mm/ 21.5"**14.5"**5"	5.43Kg/ 11.95 lbs	0.024m ³
	3PCS	565x405x400mm/ 22.24"**15.94"**15.75"	17.33KG/ 38.13 lbs	0.092m ³
NG-PL-200W	1PC	545x375x115mm/ 21.5"**14.5"**5"	5.52Kg/ 12.14 lbs	0.024m ³
	3PCS	565x405x400mm/ 22.24"**15.94"**15.75"	17.76KG/ 39.07 lbs	0.092m ³
NG-PL-240W	1PC	715x375x115mm/ 28"**14.5"**5"	6.89KG/ 15.16 lbs	0.031m ³
	2PCS	735x260x400mm/ 28.94"**10.24"**15.75"	14.98KG/ 32.96 lbs	0.076m ³
NG-PL-320W NG-PL-350W	1PC	715x375x115mm/ 28"**14.5"**5"	7.34KG/ 16.15 lbs	0.031m ³
	2PCS	735x260x400mm/ 28.94"**10.24"**15.75"	15.58KG/ 34.28 lbs	0.076m ³