

# INSTALLATION INSTRUCTIONS

**\* IMPORTANT**


**READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

NGTLIGHT fixtures must be wired by qualified electrician. Proper grounding is required for safety.

Make sure power is OFF before installing or maintaining fixture.

**CAUTION:** Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

Application: Suitable for construction sites or any other location requiring a temporary light string.

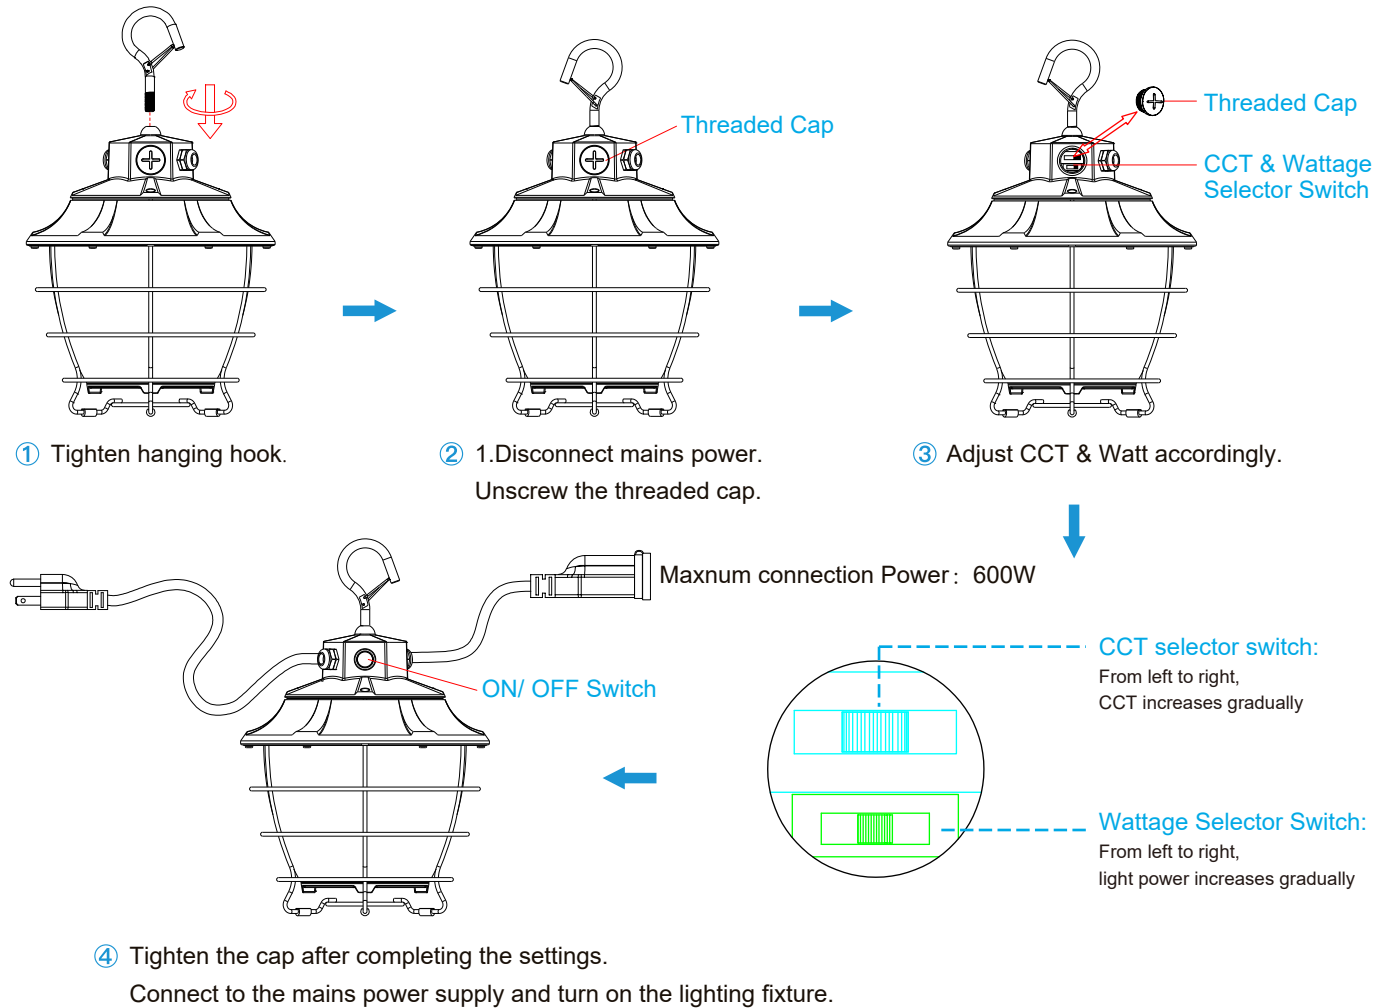

## How to adjust the temperature of the light

### Warm Notice

1. Please turn off the light before adjustable power & CCT.
2. Only turn on the light after you finished the power & CCT selection.

### CCT Selections:

There are 3 color temperatures available (CW/NW/WW)

Please select the color temperature you prefer before installation

WW	NW	CW
4500K	5000K	5700K

### Power Selections:

There are 3 power options (L/M/H), please select the power according to your needs

PTL - 60W	L(60%)	M(80%)	H(100%)
	36W	48W	60W
PTL - 100W	L(60%)	M(80%)	H(100%)
	60W	80W	100W

PTL - 80W	L(60%)	M(80%)	H(100%)
	48W	64W	80W