

## LED UFO HIGH BAY FIXTURE

LED LIGHTS MANUFACTURER



### LED UFO HIGH BAY FIXTURE



- LED UFO High Bay fixture design for indoor replace HID/HPS/MHL high bay lights.
- Provide high performance 150LM/W and long lifespan 50K hours, perfect for commercial and manufacturing, gymnasiums, warehouse lighting fixtures, and retail aisles.
- For applications with demanding temperature requirements such as facilities in southern climates.
- These fixtures range from 150W~240W and are suitable for 20 to 25-foot mounting heights.
- Polycarbonate lens protect LEDs from UV resistance, white and black 2 colors options.
- Special function equipped such as 0~10V remote dimming control and Microwave motion sensor.
- LED UFO High Bay fixtures are listed on the DLC Qualified Products list and are eligible for rebate.

### Features

- UL CUL DLC approved
- 100~277V input voltage
- 0~10V Dimming driver built-in 6KV surge protector
- SMD3030 150lm/w led chips
- 60° 90° 120° beam angle; 60°beam angle PC Lens
- High Heat Resistance Die Casting Heat Sink
- IP65 waterproof for both indoor and outdoor high mount applications
- 6ft wiring cord, ring bolt mounting accessory, and safety hanging kit
- Great for use in warehouse, Grocery, Garage, shopping mall etc.



Series	Lumens	LED Type	Beam Angle (Degree)	Base	Electrical Data	Color Temperature	Color Rendering Index
IHB-100W	15000Lm	210pcs SMD3030	120 degree	3 pin wires	Input Voltage 100-277V 50~60Hz Power Factor(%) > 90	WW 3000K NW 4000K DW 5000K CW 5700K	Ra>80
IHB-150W	22500Lm	210pcs SMD3030					
IHB-200W	30000Lm	238pcs SMD3030					
IHB-240W	36000Lm	305pcs SMD3030					

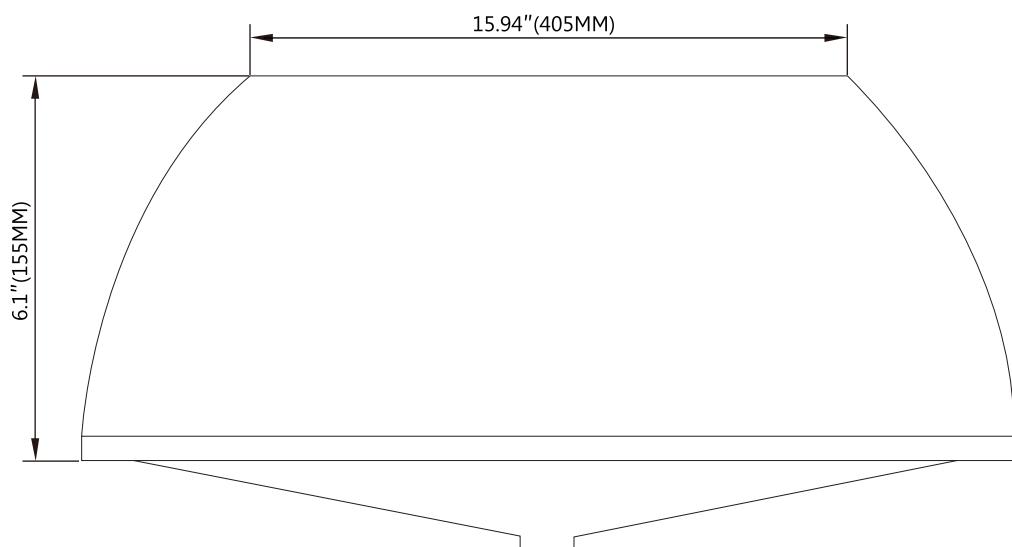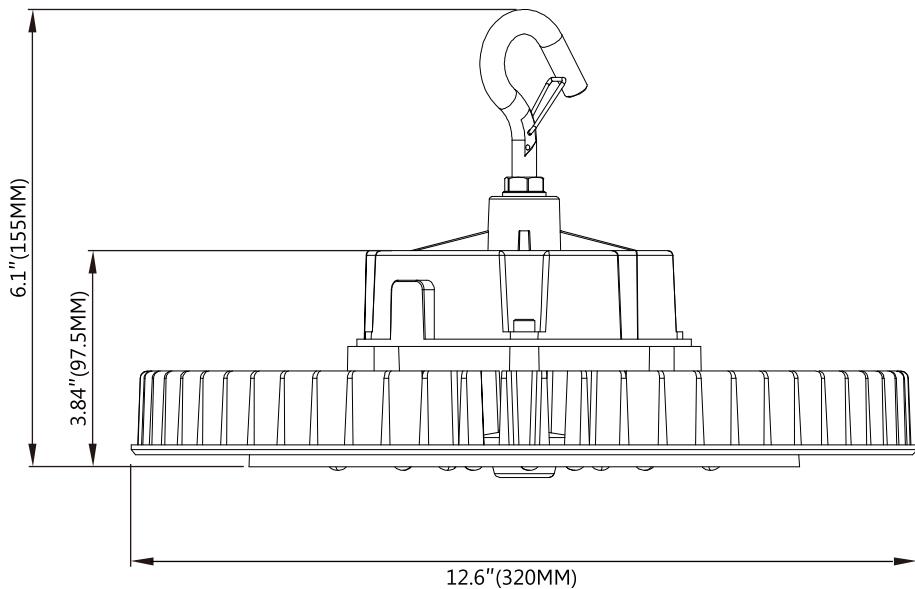

**100W/150W/200W/240W**

REFLECTOR AND LENS



White





Black



Reflector and Lens



1. Lock the PC reflector to the fixture with screws

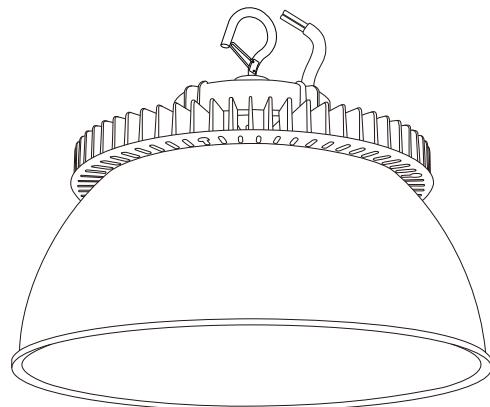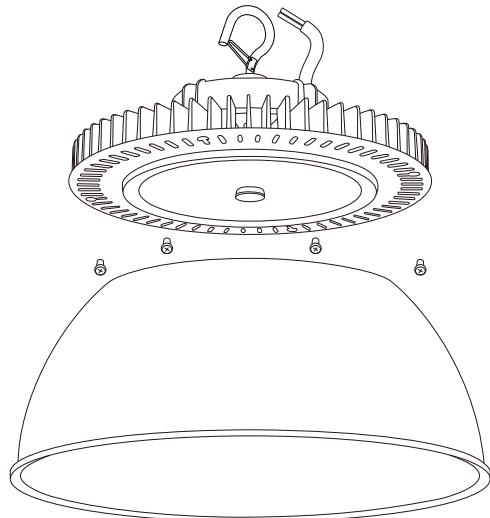


2. installation completed.

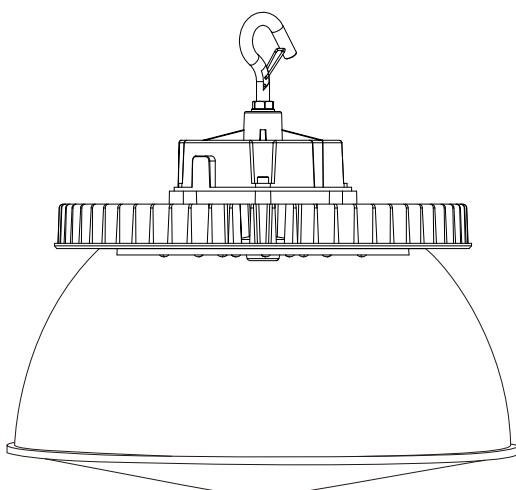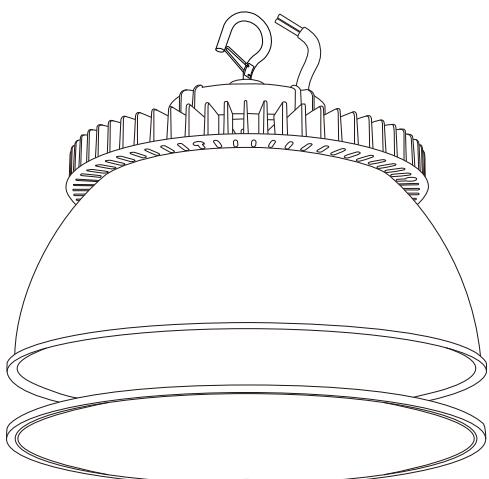


# INSTALLATION

# LED LIGHTS MANUFACTURER


1. Open outer box take out light and ring.
2. Install ring in the light body according to the diagram  
Installed the ring with light must reliable

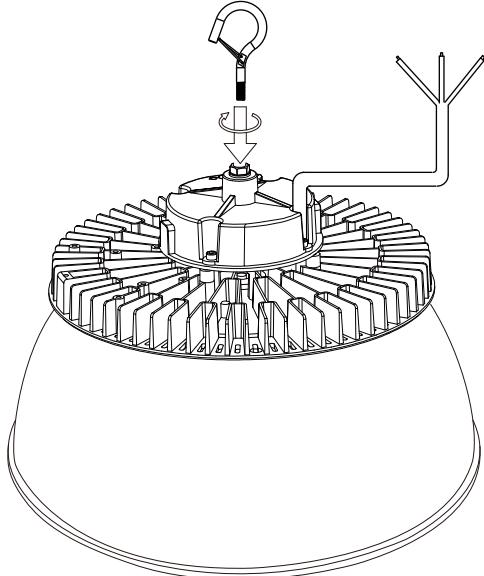

4. Hang the safety wire one side in the lamp body, another side hang in sturdy hook shown by diagram

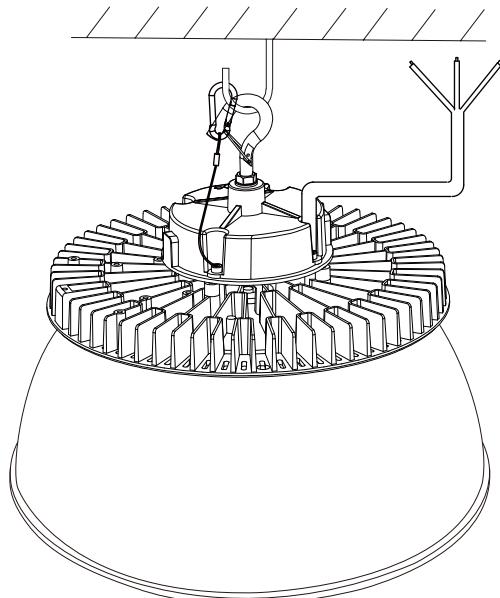

3. Install ring in sturdy hook

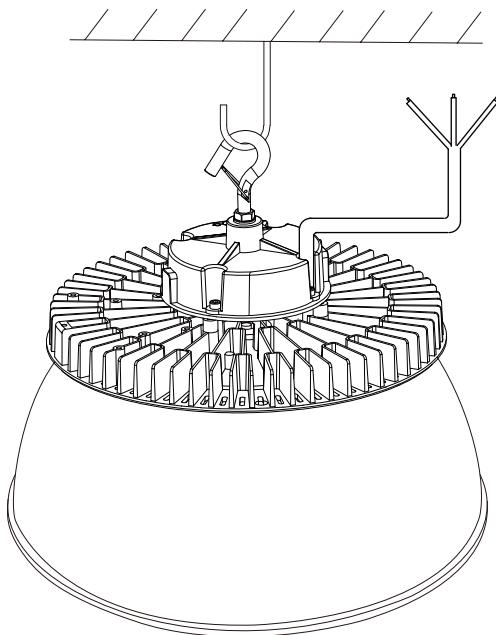



5. Wiring by below diagram

Black wire connect L




Green wire connect  $\ominus$

White wire connect N


Turn on the power to lighting

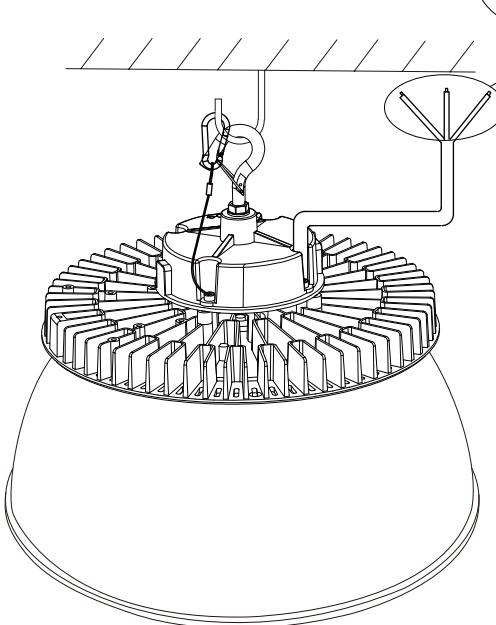

LED UFO Light can be widely used in supermarket, warehouse, garage, factory, workshops, highway toll station, gas station, exhibition hall, commercial and industrial lighting etc.

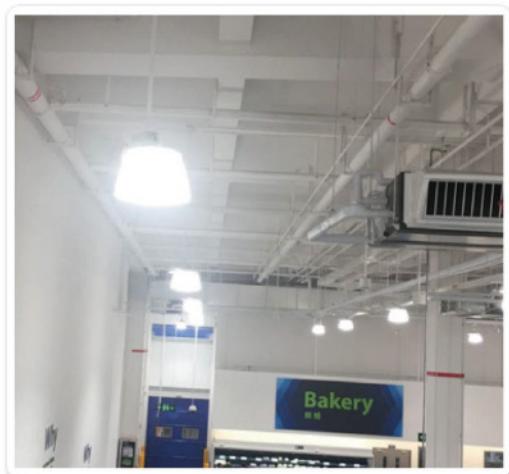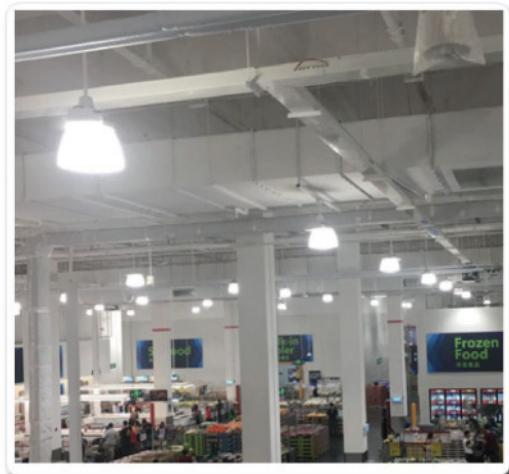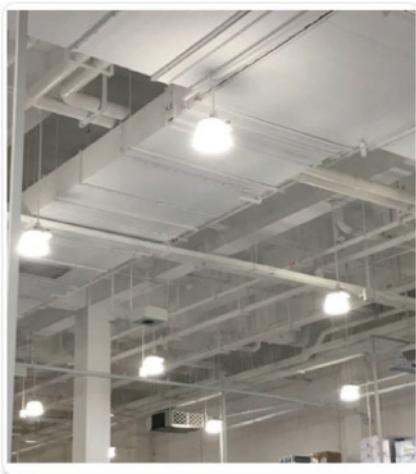

## PACKAGE

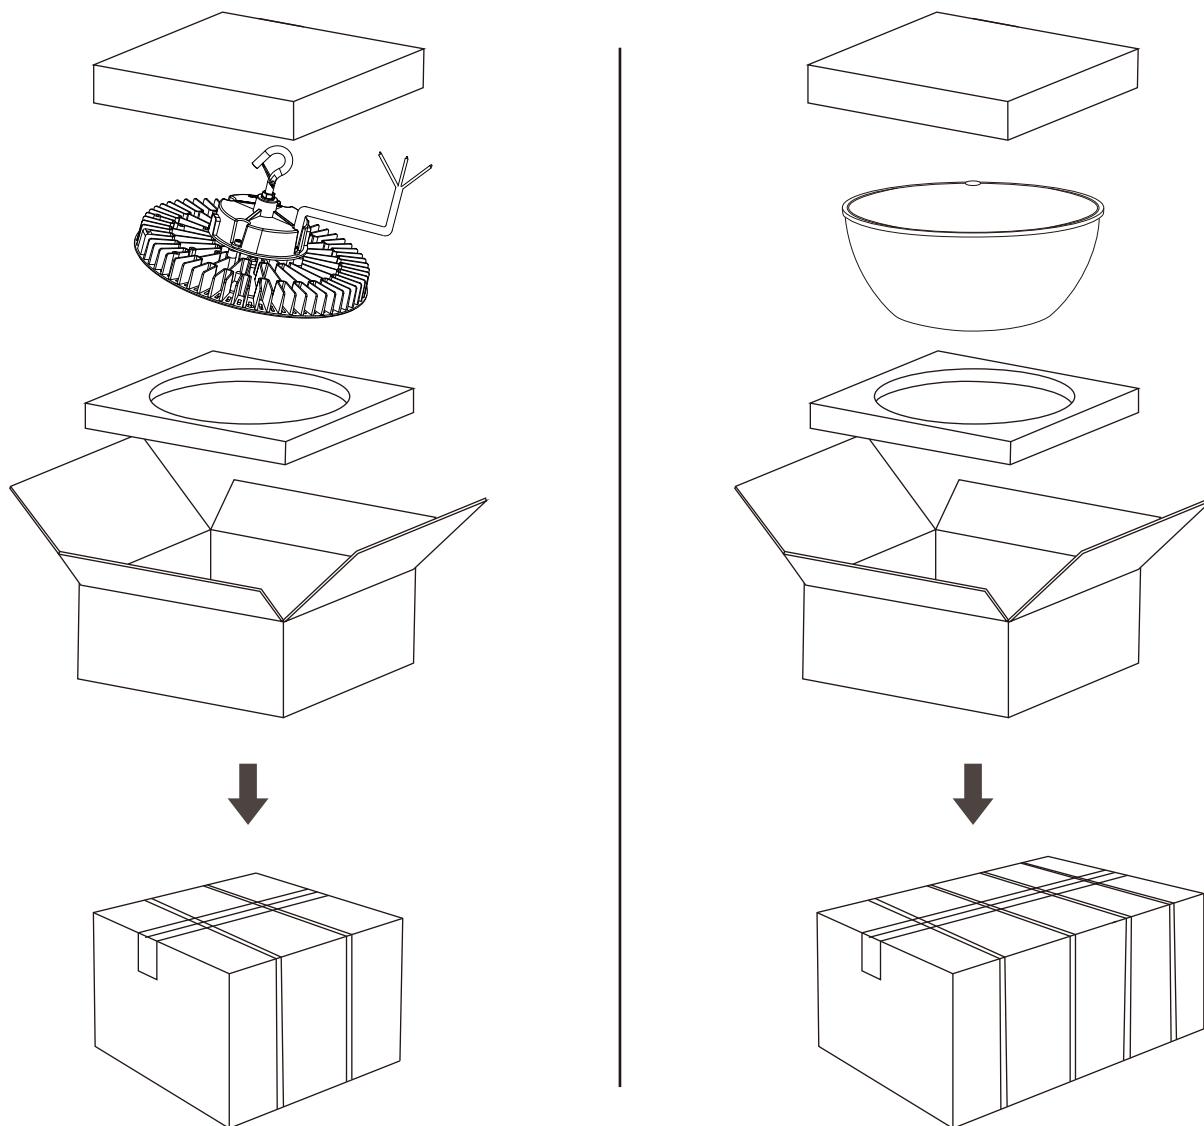

Series	Unit	Package Size	Grass weight	Volume
IHB-100W IHB-150W IHB-200W IHB-240W	1 pcs	330*330*150mm	4.8kg	0.016m <sup>3</sup>
	3 pcs	500*350*355mm	14.4kg	0.062m <sup>3</sup>
IHB Umbrella Shade	5 pcs	420*420*355mm	5kg	0.063m <sup>3</sup>