


LED ARCHITECTURAL LINEAR LIGHT

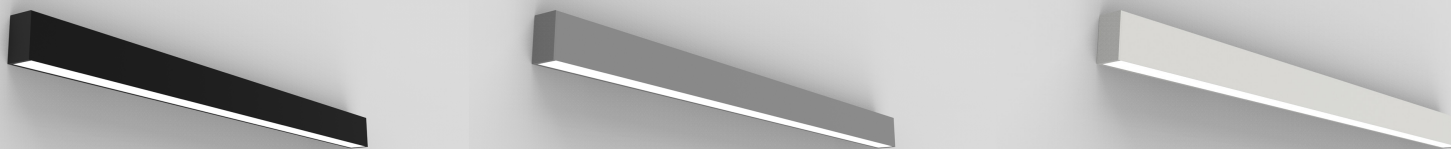

SPECIFICATIONS

Construction

- Strong, durable formula for long-lasting color.
- The diffuser and endcaps at the ends of the fixture overlap to eliminate gaps and LED visibility.
- Just 1.9 inches wide, featuring a minimalist and stylish look.
- Pendant, surface or wall mount in 2', 4', 8' lengths.

Optics

- Three optional types of indirect and direct light distributions can be set by dip switch.
- Three Field-Selectable CCTs :3000K, 4000K, 5000K.
- Scalable lumen packages range from 3,050 to 12,500 lumens and up to 125 lm/W.
- <3 SDCM color consistency, 80 CRI, or 90 CRI options.
- High-transmission polycarbonate lens for smooth light distribution and uniformity.

Electrical

- Universal 120-277 VAC input voltage.
- 0-10V dimming driver with 10%-100% dimming range.
- Selectable Wattage Levels: 100%, 75%, 50%.
- PF > 0.9, THD < 20%.
- Highly efficient and durable Class II drivers are available.
- Operating Temperature Range: -20°C to 40°C (-4°F - + 104°F).

Installation

- Dry Wall Pendant Mount.
- Drop Ceiling Pendant Mount.
- Surface Mount.
- Wall Mount.

Lifespan

- Estimated L70 ≥100,000-hour LED lifespan based on IES TM-21 calculations at 25°C.

Finish

- It's available in white, black, and silver gray.

Warranty

- 5-year limited warranty.

Certifications

- DLC ETL cETL UL cUL damp location listed.

Note

- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C (±5°C). Specifications are subject to change without notice.




Watt: 50/40/30W
 CCT: 50/40/30K
 1 2 3

NO	1	2	3
INDIRECT	30%	10%	0%
DIRECT	70%	90%	100%




FIELD-SELECTABLE WATTAGE, CCT, AND LIGHT DISTRIBUTION


- 1 **WATTAGE-SELECTABLE TECHNOLOGY**
 Three Field-Selectable Wattage Levels: 100%, 75%, 50%.
- 2 **CCT-SELECTABLE TECHNOLOGY**
 Three Field-Selectable CCTs: 3000K, 4000K, 5000K.
- 3 **DISTRIBUTION-SELECTABLE TECHNOLOGY**
 Three Field-Selectable Light Distribution Types:

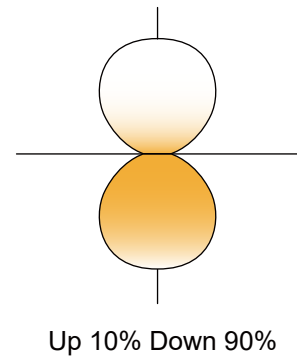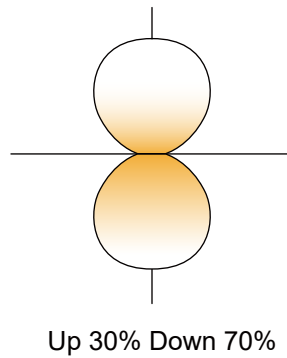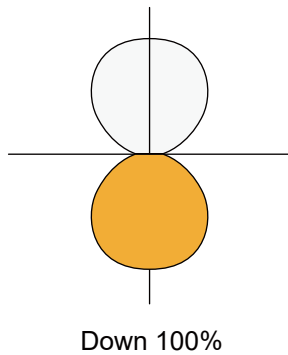


WAY TO INSTALL

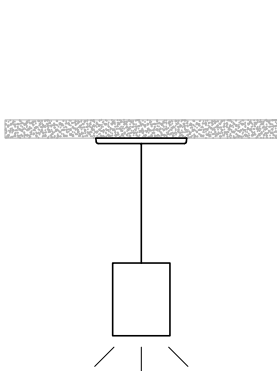


Dry Wall Pendant

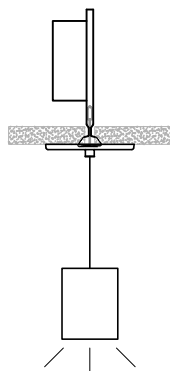

Drop Ceiling Pendant



Surface Mount



Wall Mount

PERFORMANCE DATA

	3000K(80CRI)	4000K(80CRI)	5000K(80CRI)
Delivered Lumens Per Foot	1525lm/ft	1560lm/ft	1525m/ft
Input Watts Per Foot	12.5W/ft	12.5W/ft	12.5W/ft
Lumens Per Watt	122lm/W	125lm/W	122m/W

ELECTRICAL DATA

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	525	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09
1	1050	50	120	0.42
		50	208	0.24
		50	240	0.21
		50	277	0.18
1	2100	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36


PRODUCT DIMENSION

Unit: mm/inch

L	W	H
2ft (604mm)	1.9in(48mm)	2.95in(75mm)
4ft (1180mm)		
8ft (2404mm)		

CONTINUOUS RUN


120VAC: Connections up to 32ft.
277VAC: Connections up to 80ft.

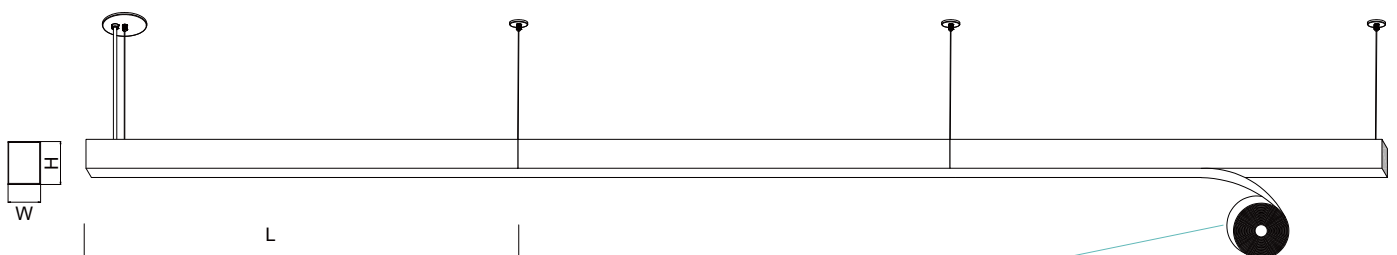

Diffuser (Sold Separately)

Optional continuous rolling lens runs up to 40'.

JOINER



L

ORDERING GUIDE

Fixture Type	Size	Power	Input Voltage	CCT	Finish	Light Configuration
LST06 Architectural Linear Light Series	2F 2FT	25W 25Watts	27V 120-277V	DDK Selectable Color Temperature 30K 3000K 40K 4000K 50K 5000K	B Black W White SG Silver Gray	D Direct(Down Light)
	4F 4FT	50W 50Watts				ID Indirect/Direct (Up and Down Light)
	8F 8FT	100W 100Watts				

Optics (Direct)	Optics (Indirect)	Direct/Indirect Light Output Ratio	CRI	Driver (Option)	Emergency Battery (Option)	Mounting (Option)	Internal Code
D Diffuser	D Diffuser Blank	37 Up 30% Down 70% 19 Up 10% Down 90% 01 Down 100%	H 80 Y 90	D 0-10V Dimming	B Emergency Battery Blank Without Emergency Battery	DWP Dry Wall Pendant DCP Drop Ceiling Pendant SM Surface Mount WM Wall Mount Blank	Blank Alphanumeric