

LED TEMPORARY WORK LIGHT

Outstanding lighting quality
 Convenient & professional
 No fan Passive cooling solution
 360 degree Beam Angle lighting
 Link up to 7 units (Max 600 Watts)
 Energy saving, long lifespan

Features

80-100-125-150W available
 150LM/W SMD2835 Chips
 100-277VAC 50~60Hz

ETL Approved
 Operating temperature: -40~50°C
 long lifespan 50000 H
 360 degree Beam Angle
 6KV high voltage surge protection
 Color temperature: 4000K 5000K 5700K

Efficient heat dissipation
 Plug-n-Play design
 IR control function available (Customized)
 Suitable for dry and damp locations
 Hollow heatsink increase air flow
 No magnetic disturbance driver design
 5 years warranty




Applications


LED Temporary Work Light series can be widely used in warehouses, wharf, factories and workshops, highway toll stations, gas stations, mine, etc.



Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
NG-TWX-80W	9000LM	3 pin wires	360 degree	Input Voltage 100-277V 50~60Hz Power Factor(%) >90	SMD2835 chips	WW 2800~3000 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	80 80 CRI
NG-TWX-100W	15000LM	3 pin wires					
NG-TWX-125W	18750LM	3 pin wires					
NG-TWX-150W	22500LM	3 pin wires					


Where "X" can be Y or G, where Y represents color is Yellow, G represents color is Gray.

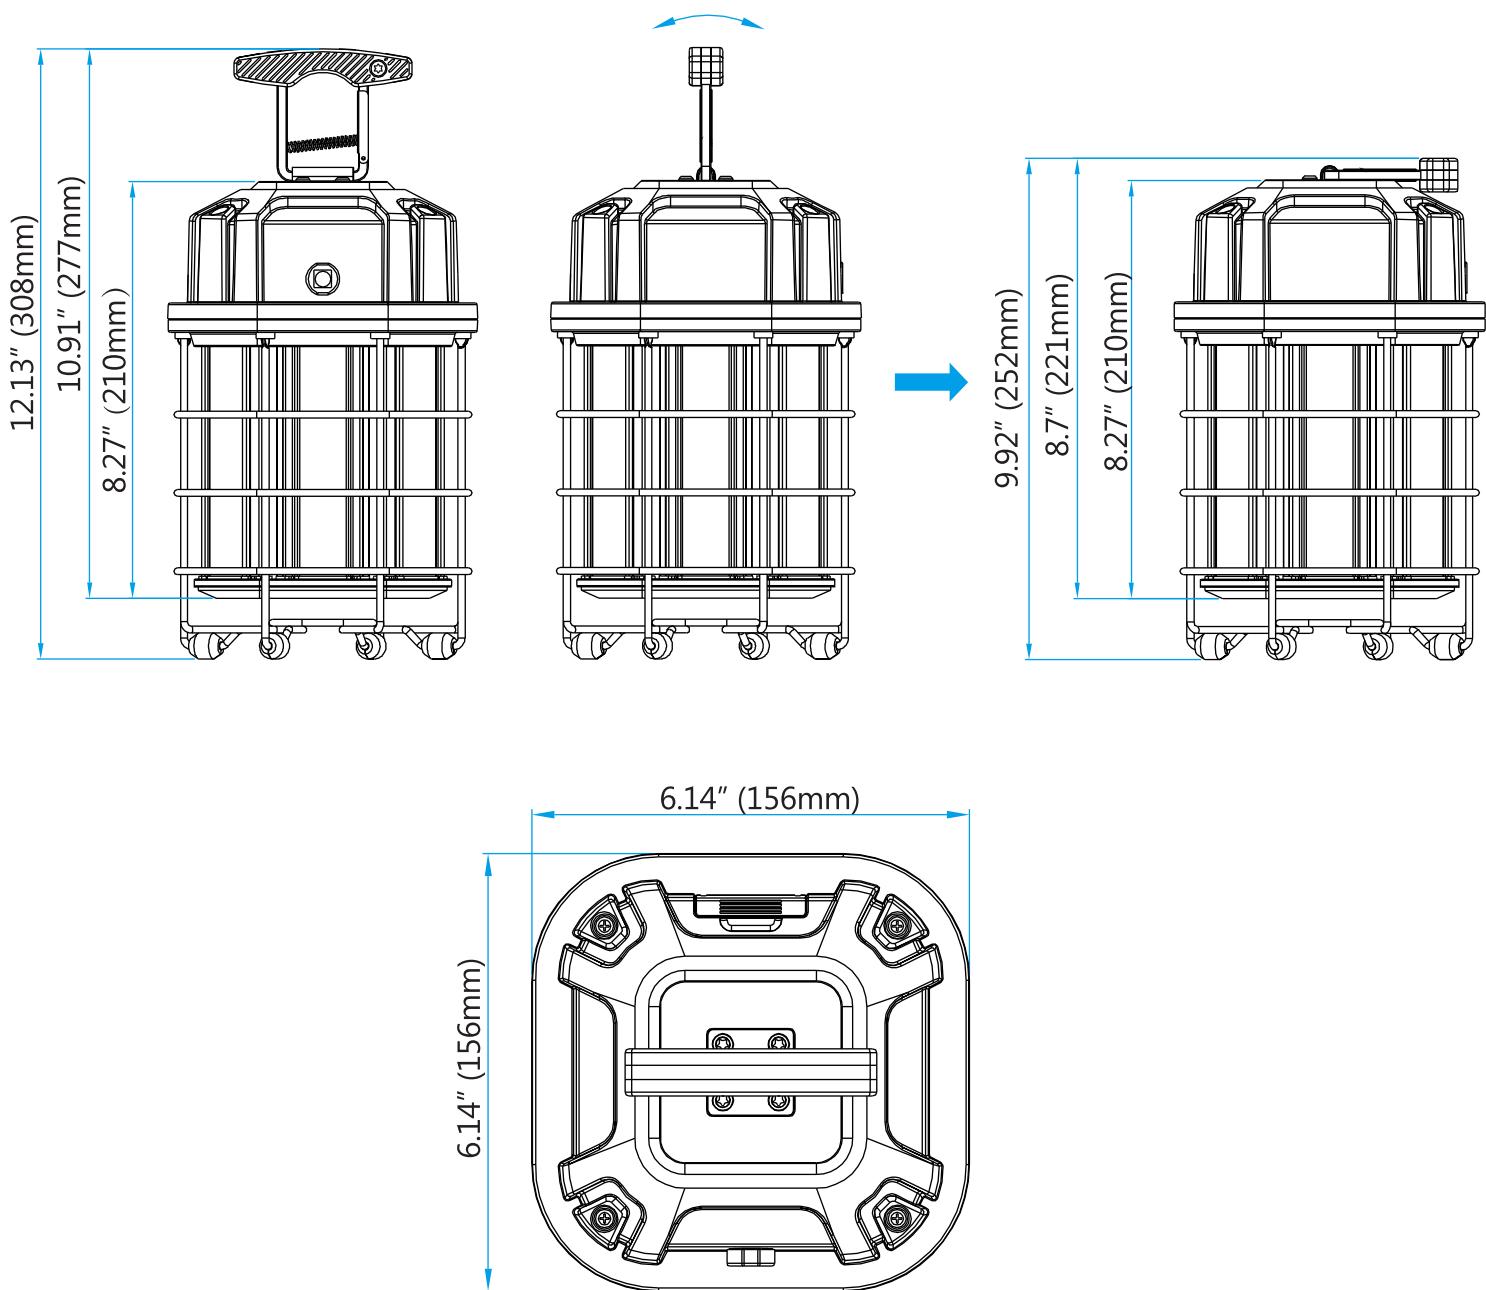80W, 100W

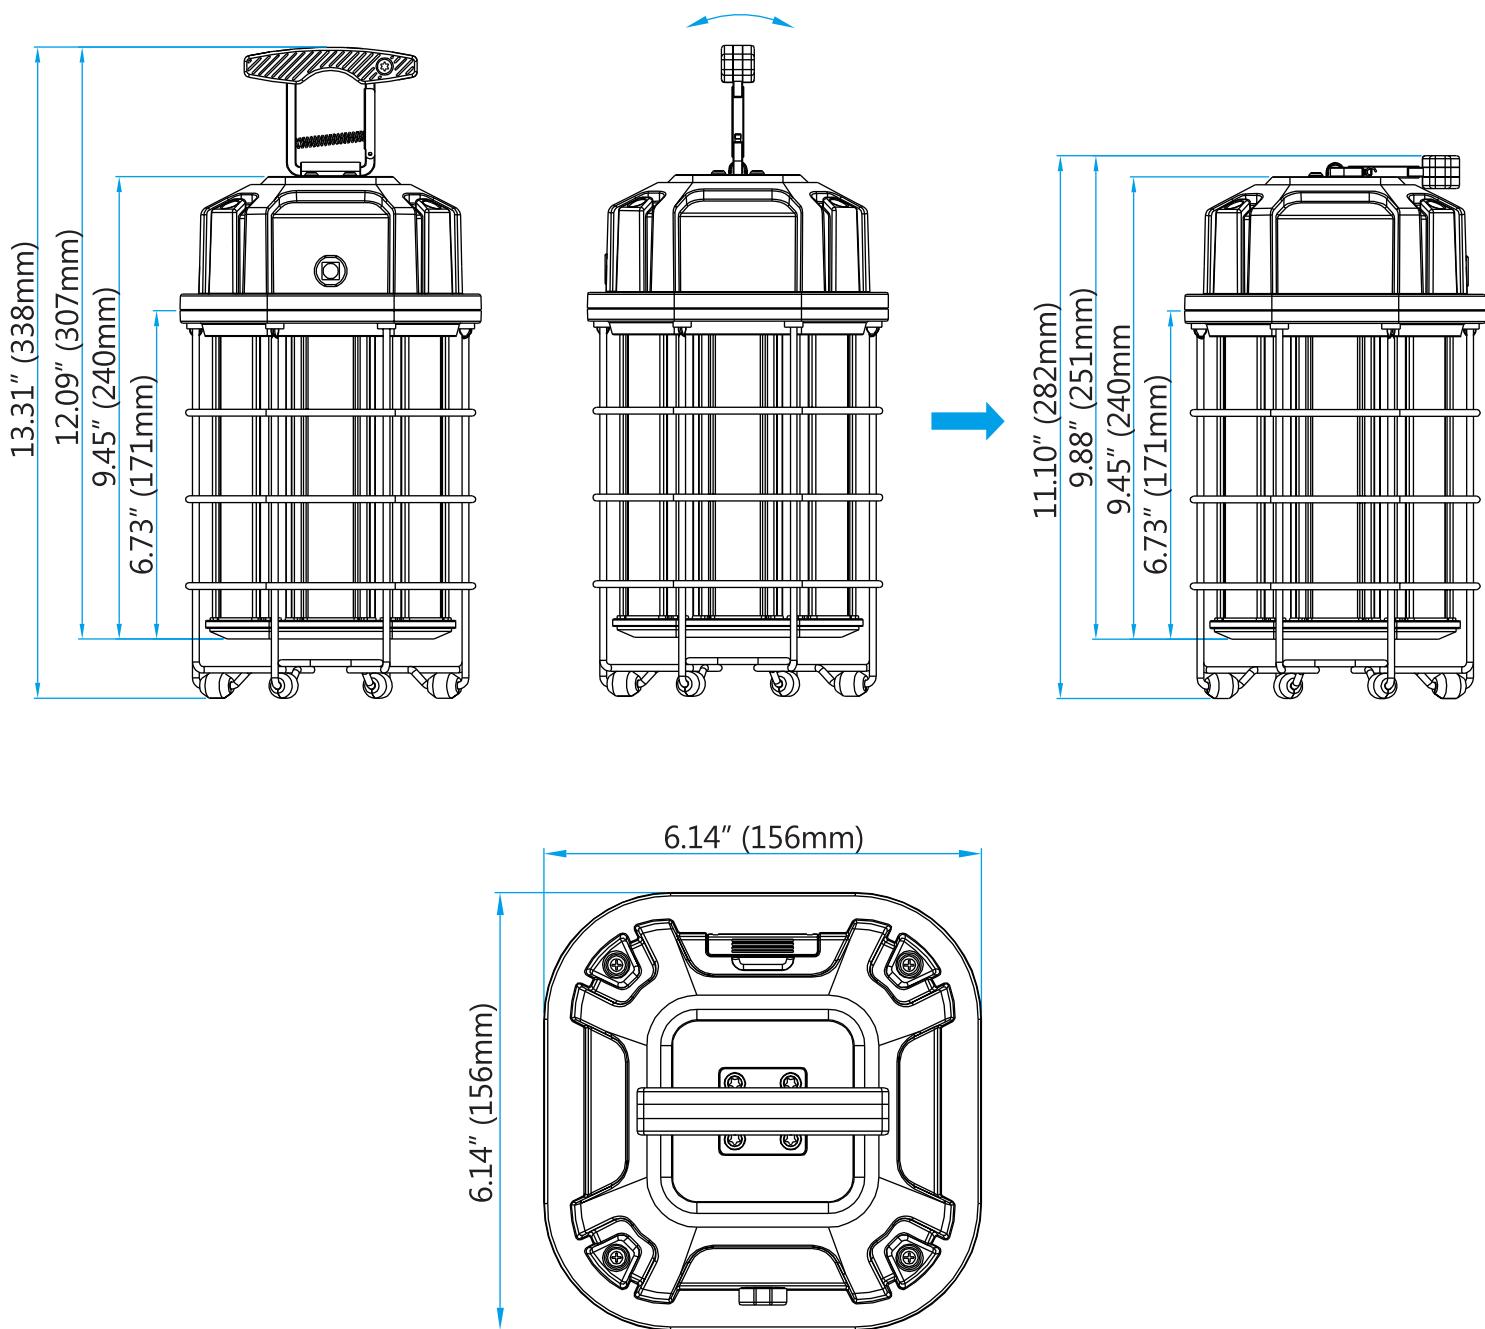
125W, 150W



LED LIGHTS MANUFACTURER
INSTALLATION INSTRUCTIONS

1. Take the LED Temporary Work Light with hook from the package.

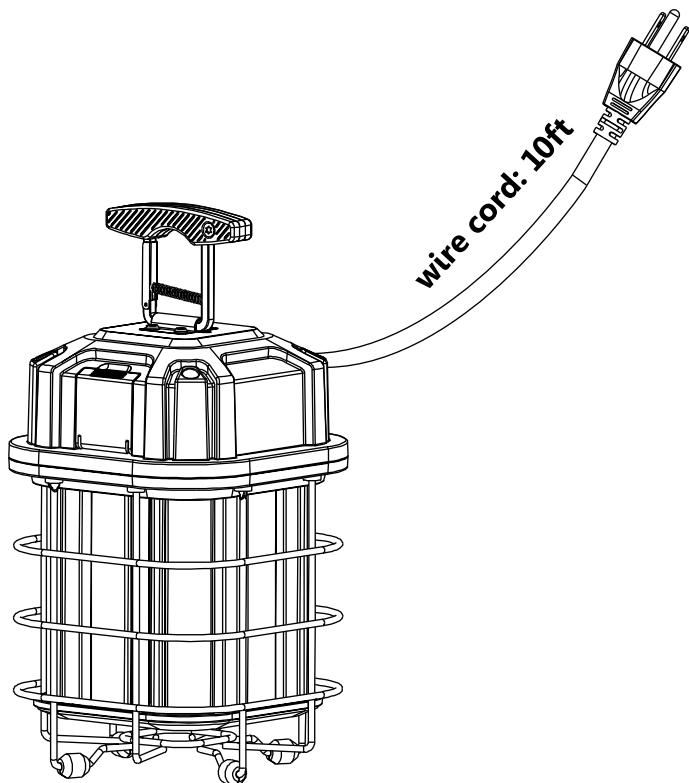


2. Install lamp hooks on reliable hooks or walls.

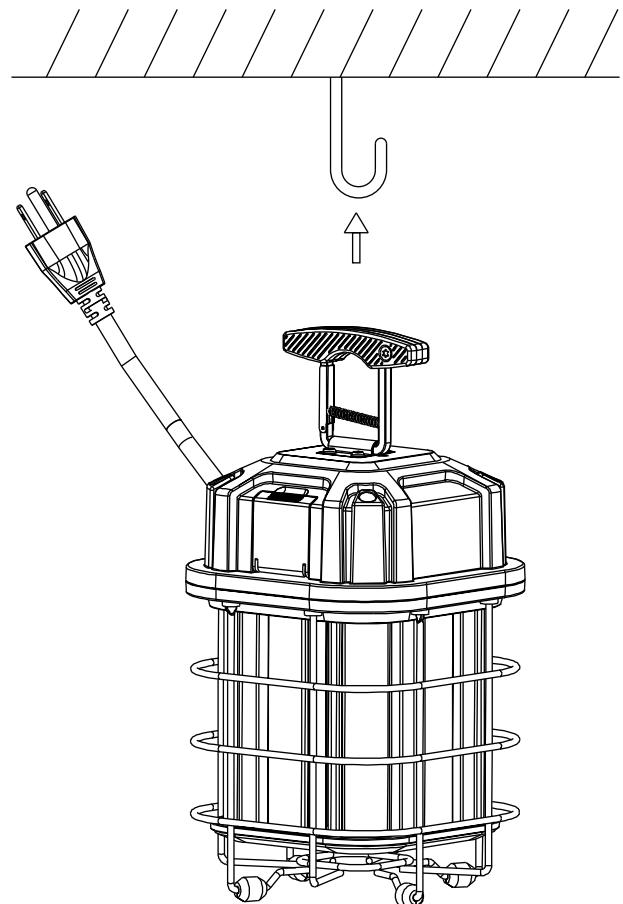

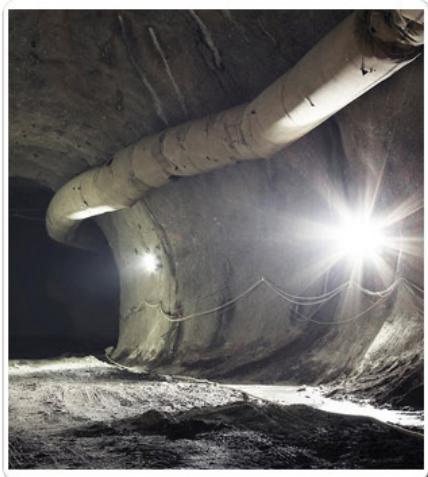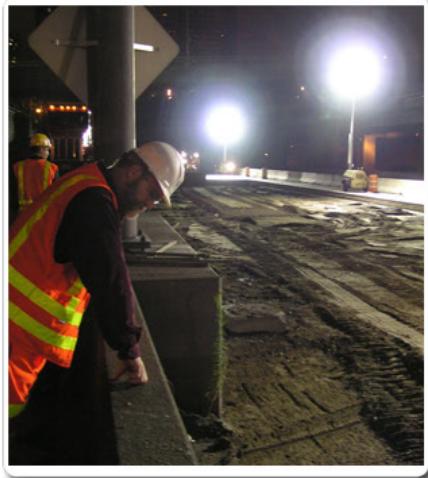

PACKAGE

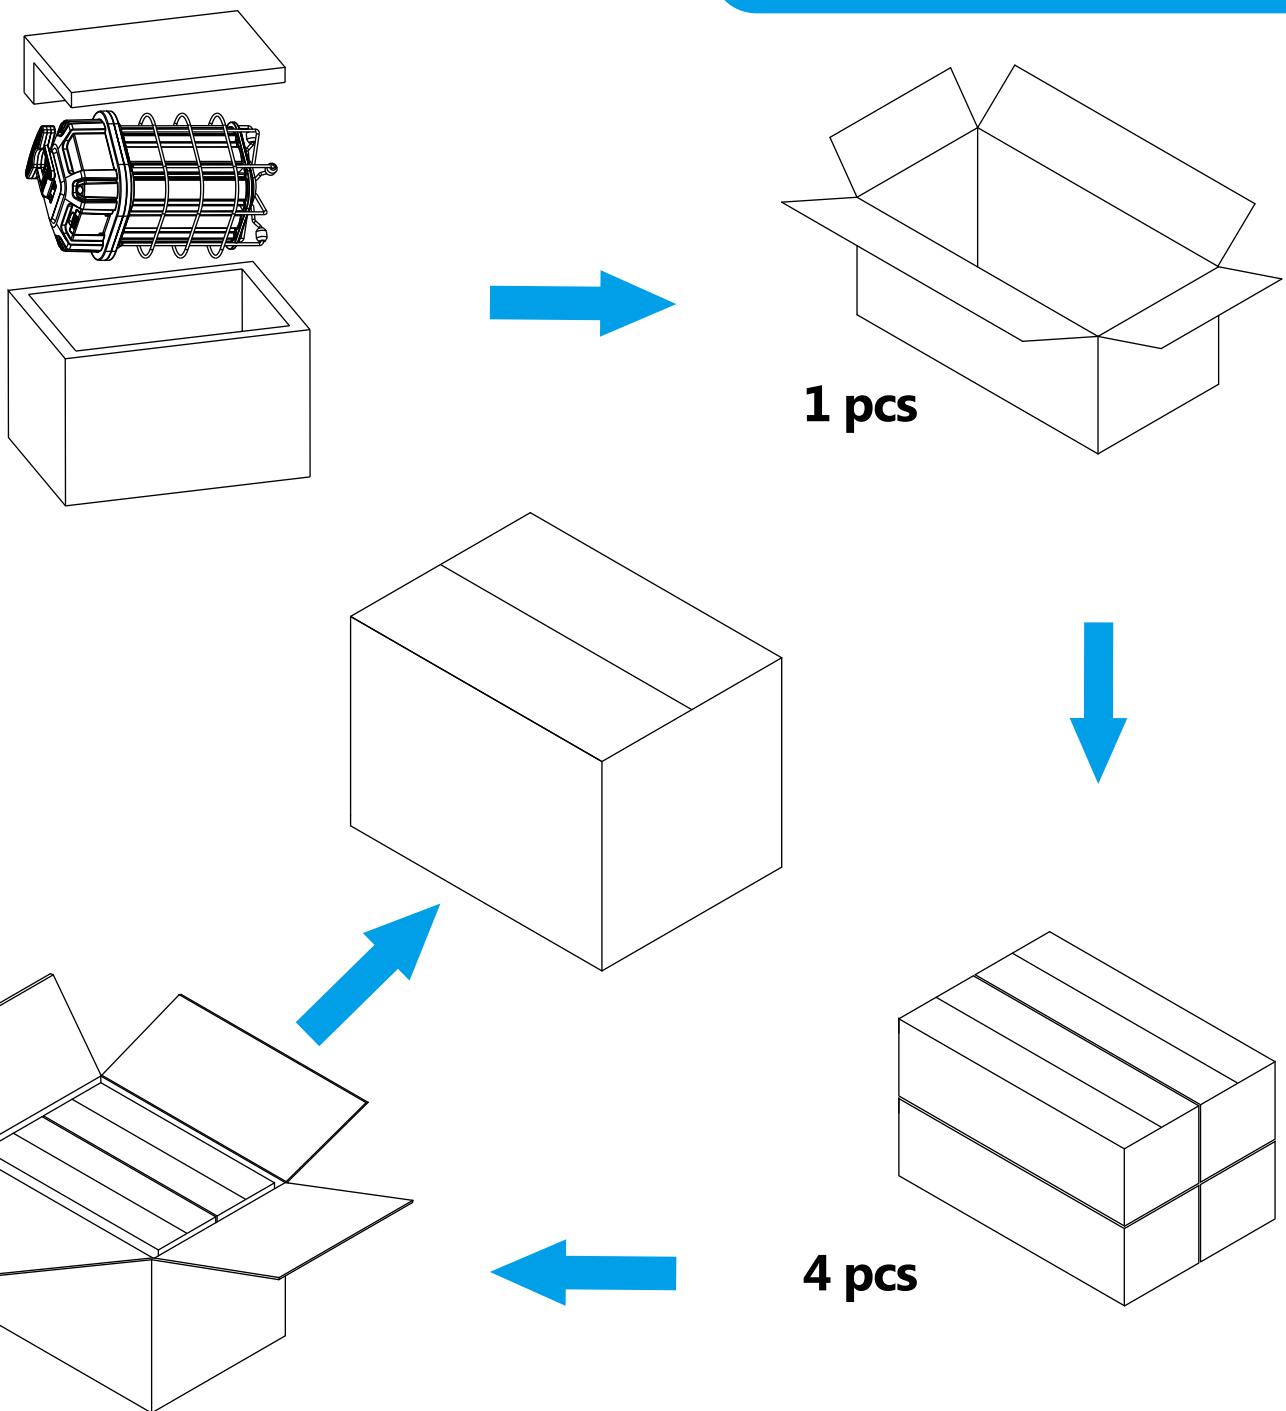

Series	Unit	Size	Gross weight
NG-TWX-80W	1Pcs	32.5*24.5*20.5 CM	2.7 KG
	4Pcs	51.0*34.5*43.5 CM	12.3 KG
NG-TWL-125W	1Pcs	32.5*24.5*20.5 CM	3.2 KG
	4Pcs	51.0*34.5*43.5 CM	13.5 KG