


POWER & CCT TUNABLE LED UFO HIGH BAY 150~300W



LED UFO High Bay fixture design for indoor replace HID/HPS/MHLhigh bay lights. Equipped with color and power select technology, adjustable 3000K-4000K-5000K, 150W/200W/240W/300W options. Reduce SKU and increase both flexibility and convenience with field adjustable power outputs. Provide high performance 150LM/W and long lifespan 50K hours, perfect for commercial and manufacturing, gymnasiums, warehouse lighting fixtures, and retail aisles. For applications with demanding temperature requirements such as facilities in southern climates. These fixtures are suitable for 20 to 25-foot mounting heights. Extra accessories like reflectors, motion sensors and emergency batteries. uplight + downlight. Or 100-277VAC. Special function equipped such as 0~10V remote dimming control and Microwave motion sensor. LED UFO High Bay fixtures are listed on the DLC Qualified Products list and are eligible for rebate.





Features:

*Power : NG-UFOPR-150W: 150/120/100W NG-UFOPR-200W: 200/150/120W
NG-UFOPR-240W: 240/200/150W and NG-UFOPR-300W: 300/240/180W

*Remote control dimmable and microwave motion sensor available

*>50,000-hrs lifespan based on IES LM-80 calculations

*Power and CCT tunable fixture (100-277V)

*CCT tunable: 3000K/4000K/5000K

*UL cUL DLC ETL cETL listed

*6' cord for input and dimming wires


*Built-in 6kV surge protection

*Available in 100-277VAC

*Suitable for wet locations

*5-year warranty

Available accessories: Aluminum and polycarbonate reflector, wireguard and drop lens

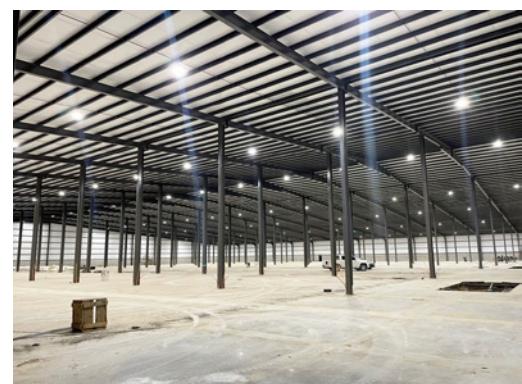


Specifications:

| Item Number | Lumens | Wattage | CCT | Input Voltage | Efficiency | Lifespan | CRI | PF | LED Type |
|---------------|----------|----------------------|-------------------------|---------------|------------|----------|-------|-------|----------|
| NG-UFOPR-150W | 22,500Lm | 100W 120W 150W | | | | | | | |
| NG-UFOPR-200W | 30,000Lm | 120W 150W 200W | 3000K 4000K 5000K | 100~277V | 150LM/W | 50,000 | Ra>80 | >0.95 | SMD3030 |
| NG-UFOPR-240W | 36,000Lm | 150W 200W 240W | | | | | | | |
| NG-UFOPR-300W | 45,000Lm | 180W 240W 300W | | | | | | | |


Details




long-lifespan surface
mount high lumen
150LM/W SMD3030
LED Chips

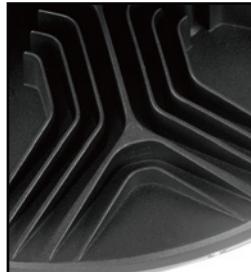

Precision die-casting
aluminum rugged
heatsink.

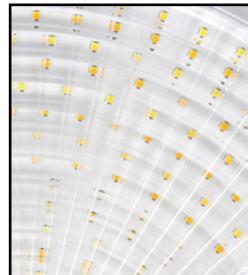


Acrylic 98% high
transmittance lens

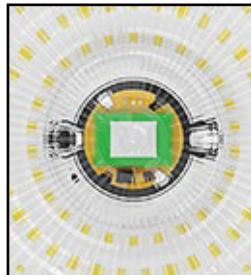


Microwave motion
sensor and dimmable
sensor area

DIMENSIONS:

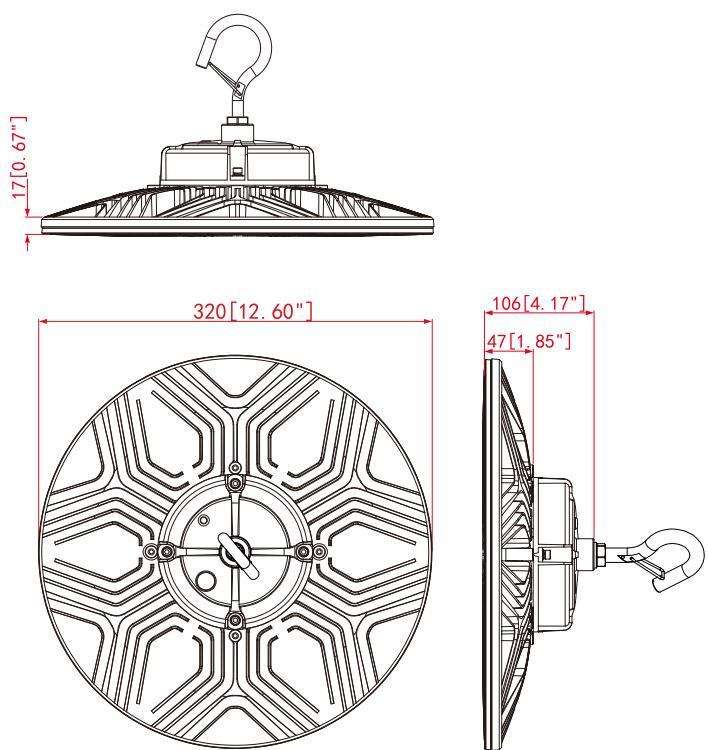


150W/200W

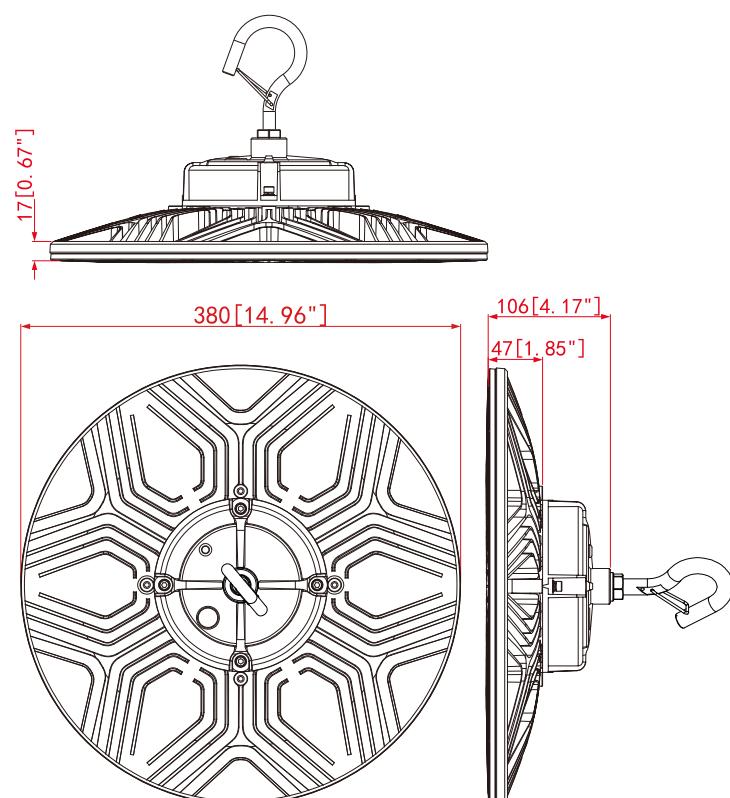


240W/300W

INSTALLATION INSTRUCTIONS:


1. Open the box and take out the LED light and ring.
2. Install the ring into the light body as following diagram.

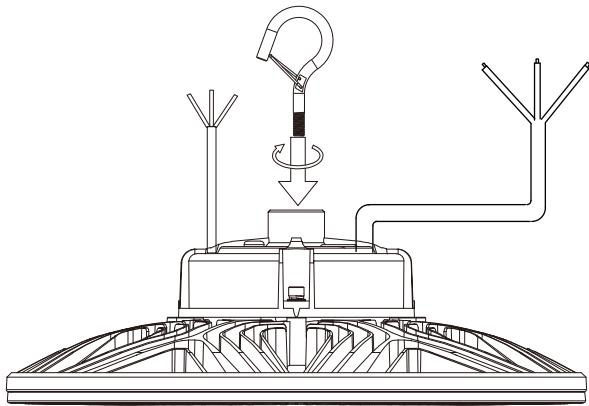

3. Hung the LED light with a sturdy hook.

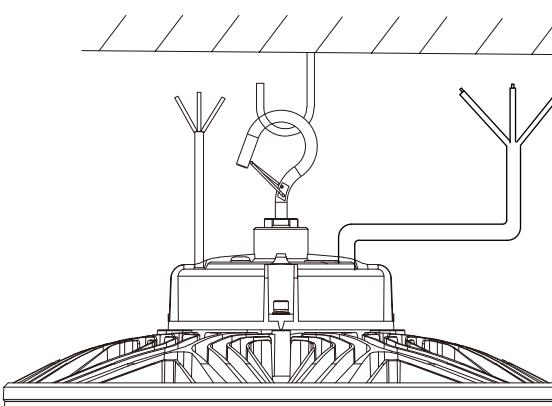

4. Hang the safety wire one side to the lamp, another side to the sturdy hook shown by diagram.

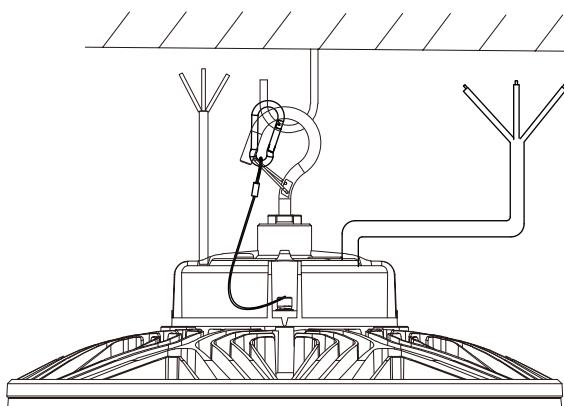

5. Connect wires as below diagram and turn on power to lighting.

Black wire : L


Green wire:

White wire : N


Black/White: Vaux+

Purple: DIM+

Pink: DIM-/Vaux-

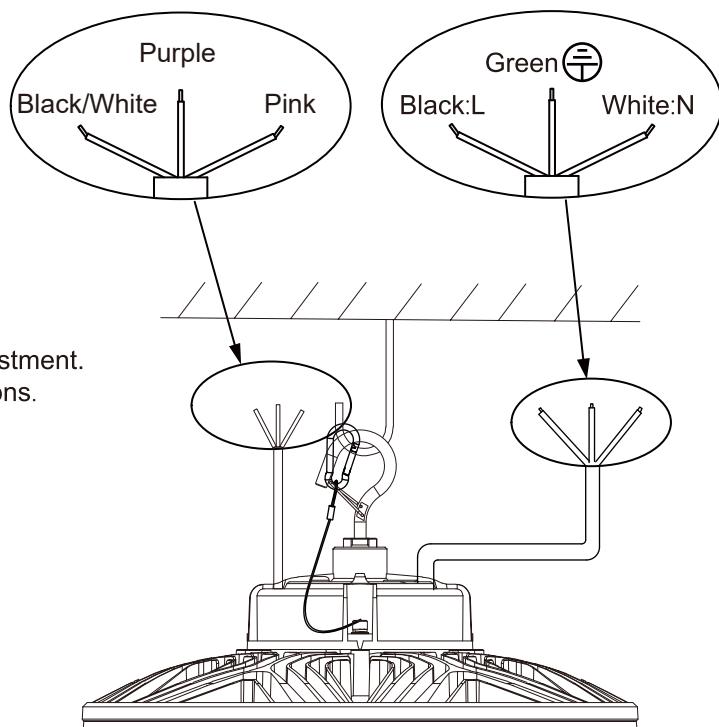


6. Use remote control to adjust product brightness, 0-100% adjustment. Or use microwave induction to intelligently adjust product functions.

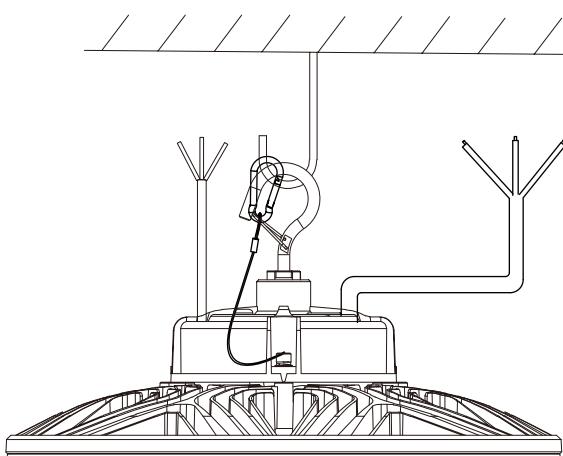



PACKAGE

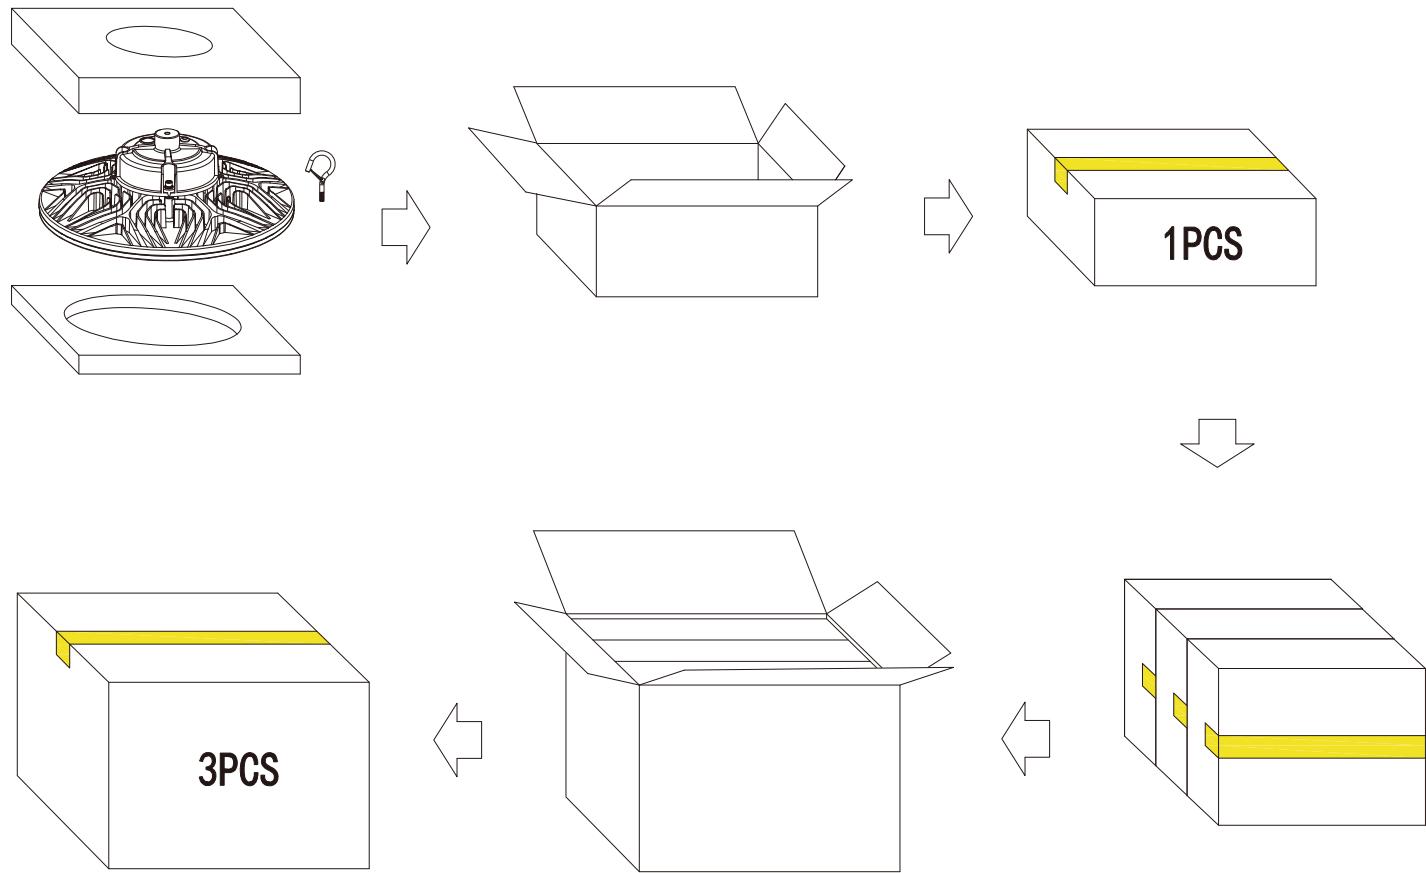

| Power | Unit | Size | Grass weight | Volume |
|--------------|------|---------------|--------------|---------------------|
| 150W 200W | 1PCS | 330X330X150mm | 3.5 Kg | 0.108m ² |
| | 3PCS | 500X350X355mm | 14.5 Kg | 0.177m ² |

| Power | Unit | Size | Grass weight | Volume |
|--------------|------|---------------|--------------|---------------------|
| 240W 300W | 1PCS | 390X390X150mm | 4.3 Kg | 0.15m ² |
| | 3PCS | 490X410X415mm | 17.5 Kg | 0.203m ² |