


INSTALLATION INSTRUCTIONS

Warning: Do not cut off electrical source in order to avoid electrical shock and endanger life-safety before installation.

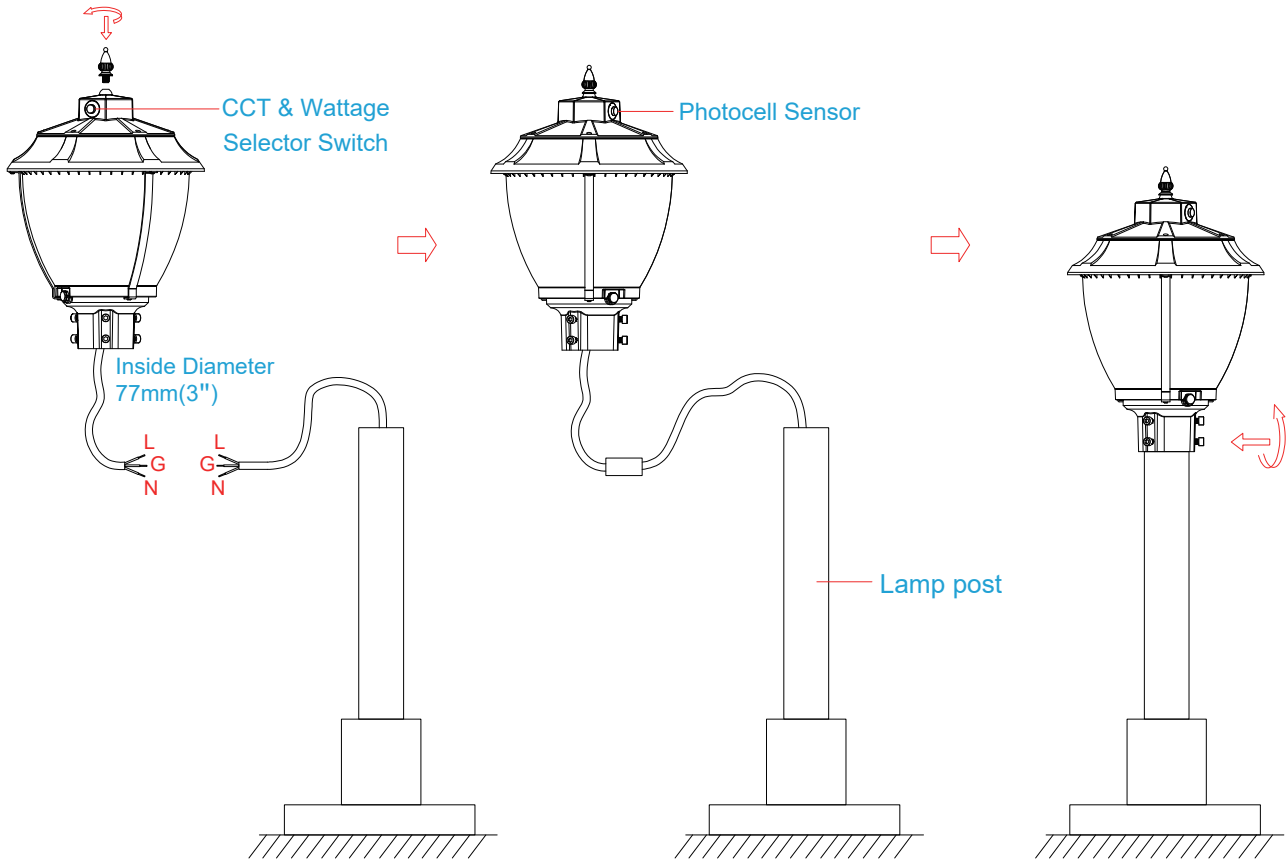

1. Mount the decorative finial onto the top of the fixture.
2. Connect the lighting fixture's AC cable to the lamp post's input cable:

Black to live wire (L);

White to neutral wire (N);

Green to ground wire (G).

LINE	—●—	BLK
NEU	—●—	WHI
GRND	—●—	REN,GRN/YEL


3. Insulate the cable connections.
4. Insert the lighting fixture into the lamp post and tighten 6 fixing screws.
5. Unscrew the threaded cap, set the desired power and color temperature, then tighten the cap.
6. Remove the light sensor cap if photocell sensor function is needed.

INSTALLATION INSTRUCTIONS

How to adjust the temperature of the light

Warm Notice

1. Please turn off the light before adjustable power & CCT.
2. Only turn on the light after you finished the power & CCT selection.

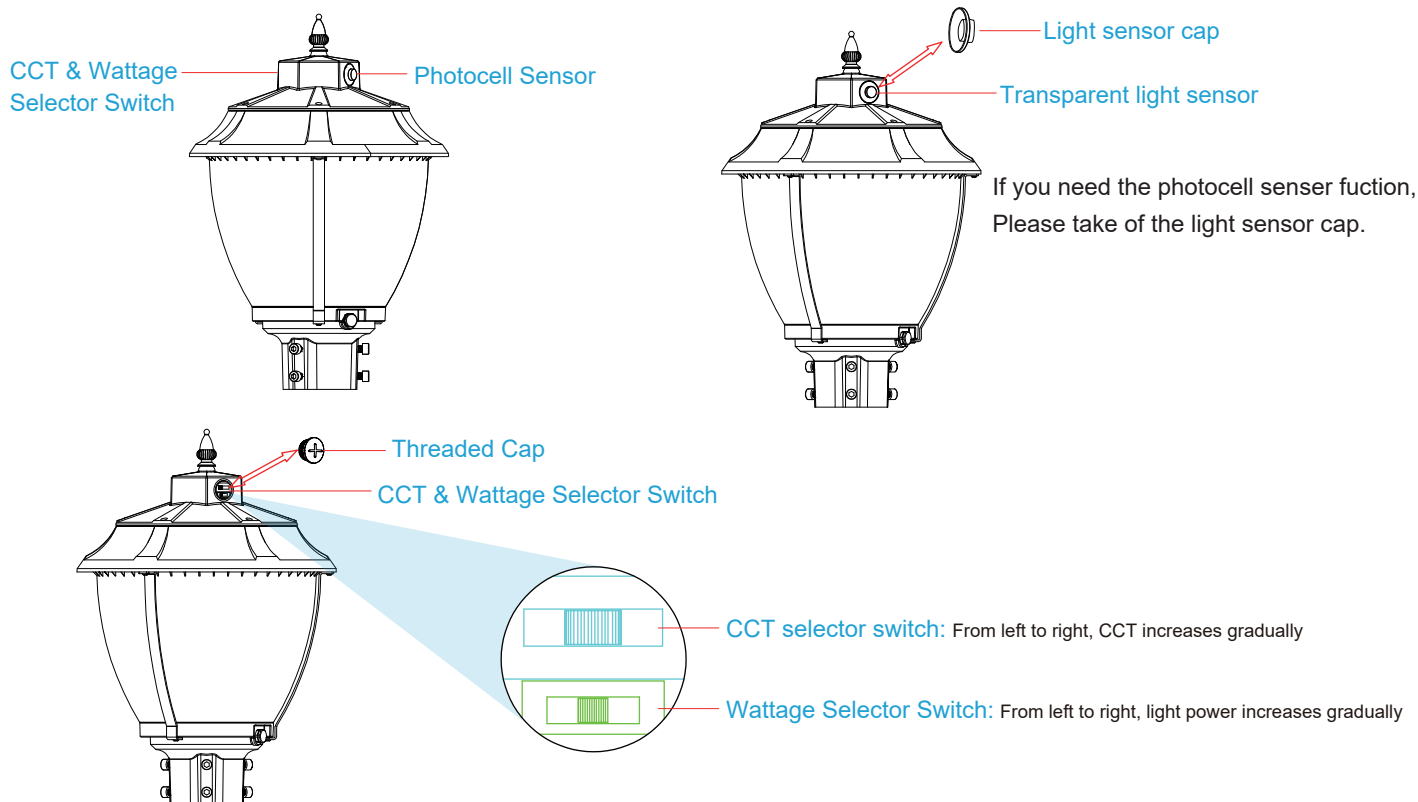

1. Disconnect mains power. Unscrew the threaded cap.
2. Set the desired power and color temperature.
3. Tighten the cap after completing the settings.
4. Remove the light sensor cap if photocell sensor function is needed.

CCT Selections:

There are 3 color temperatures available (WW/NW/CW)

Please select the color temperature you prefer before installation

WW	NW	CW
3000K	4000K	5000K

Power Selections:

There are 3 power options (L/M/H), please select the power according to your needs

UPAL-60W	L(60%)	M(80%)	H(100%)
	36W	48W	60W

UPAL-100W	L(60%)	M(80%)	H(100%)
	60W	80W	100W

UPAL-150W	L(60%)	M(80%)	H(100%)
	90W	120W	150W